



Maintenance Mode Box MMB300 incl. connecting cable 1.5 m 3VA - MMB300 accessory for: 3VA6

Model	
product brand name	SETRON
product designation	Maintenance mode box MMB300
accessories	Digital input and output module
General technical data	
suitability for operation	Installation in fixed switchboard inside enclosed rooms
mounting position	any
degree of pollution	3
protection class IP	IP20 according to IEC60529
Voltage	
Rated control supply voltage U_s with DC / maximal	24 V
Mechanical Design	
product function	
• electronic tripping unit power supply	Yes
• digital input and output module	Yes
number of interfaces / of the circuit breaker communication system	1
number of digital inputs	1
input voltage / at digital input / at DC / rated value	24 V
operating range of digital input	IEC: SELV/ PELV UL: Class2
input voltage / at digital input	
• initial value for signal<1>-recognition	15 V
• full-scale value for signal<0> recognition	5 V
number of relay outputs	2
voltage / of the output relay	
• at AC / maximum	250 V
• at DC / maximum	250 V
operational current / of the output relay	
• at AC / at 250 V / rated value	6 A
• at DC / at 30 V / rated value	5 A
switching capacity current / of the output relay	
• at AC-12 / at 250 V	6 A
• at AC-15 / at 250 V	3 A
• at DC-12 / at 250 V	0.2 A
• at DC-13 / at 250 V	0.1 A
output current / of the output relay	
• for signal <1> / initial value	10 mA
• for signal <1> / full-scale value	27 mA
• for signal <0> / maximum	0.2 mA
design of DIAZED fuse link / for short-circuit protection of auxiliary contacts of output relay	D0 6 A 500 V gL/gG

overvoltage category / of the output relay	III (relay) I (other)
power loss [V·A] / rated value	4.8 VA
control supply voltage / at DC / rated value / maximum	24 V
relative symmetrical tolerance / of the operating range of the control feed voltage	20 %
consumed current / maximum	0.2 A
height	116 mm
width	70 mm
depth	36 mm
net weight	130 g
type of electrical connection	removable/pluggable
type of electrical connection / at the inputs for supply voltage	screw-type terminals
connectable conductor cross-section / solid • minimum • maximum	0.5 mm ² 2.5 mm ²
connectable conductor cross-section / finely stranded / with core end processing • minimum • maximum	0.5 mm ² 2.5 mm ²
type of connectable conductor cross-sections / at the digital inputs / for AWG cables / solid	1x 21 to 14; 2x 21 to 16
ambient temperature / during operation • minimum • maximum	-25 °C 60 °C
ambient temperature / during transport • minimum • maximum	-25 °C 80 °C
ambient temperature / during storage • minimum • maximum	-25 °C 70 °C
tightening torque / with screw-type terminals / minimum	3.56 N·m
tightening torque / with screw-type terminals / maximum	4.44 N·m
ambient temperature / during storage • minimum • maximum	-25 °C 70 °C

Certificates

General Product Approval

EMV



[Miscellaneous](#)



Test Certificates

Maritime application

other

Environment

[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)



[Environmental Confirmations](#)

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9977-0UF10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9977-0UF10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9977-0UF10


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

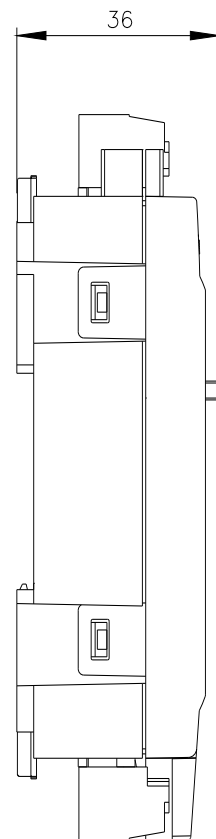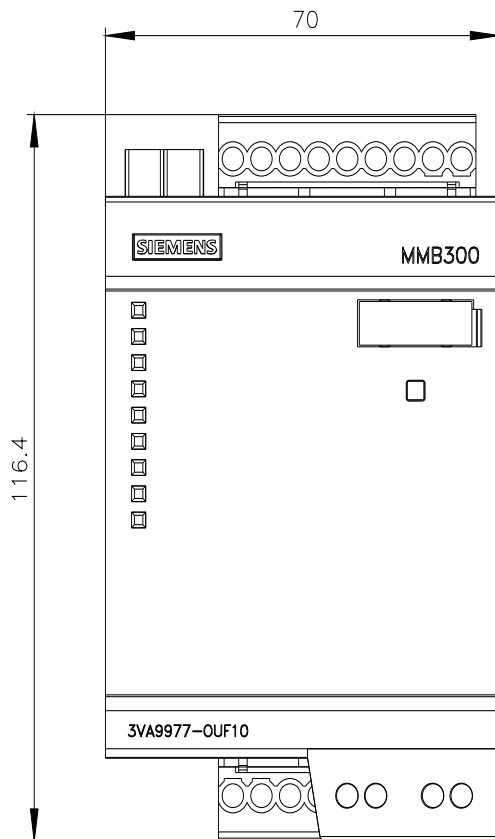

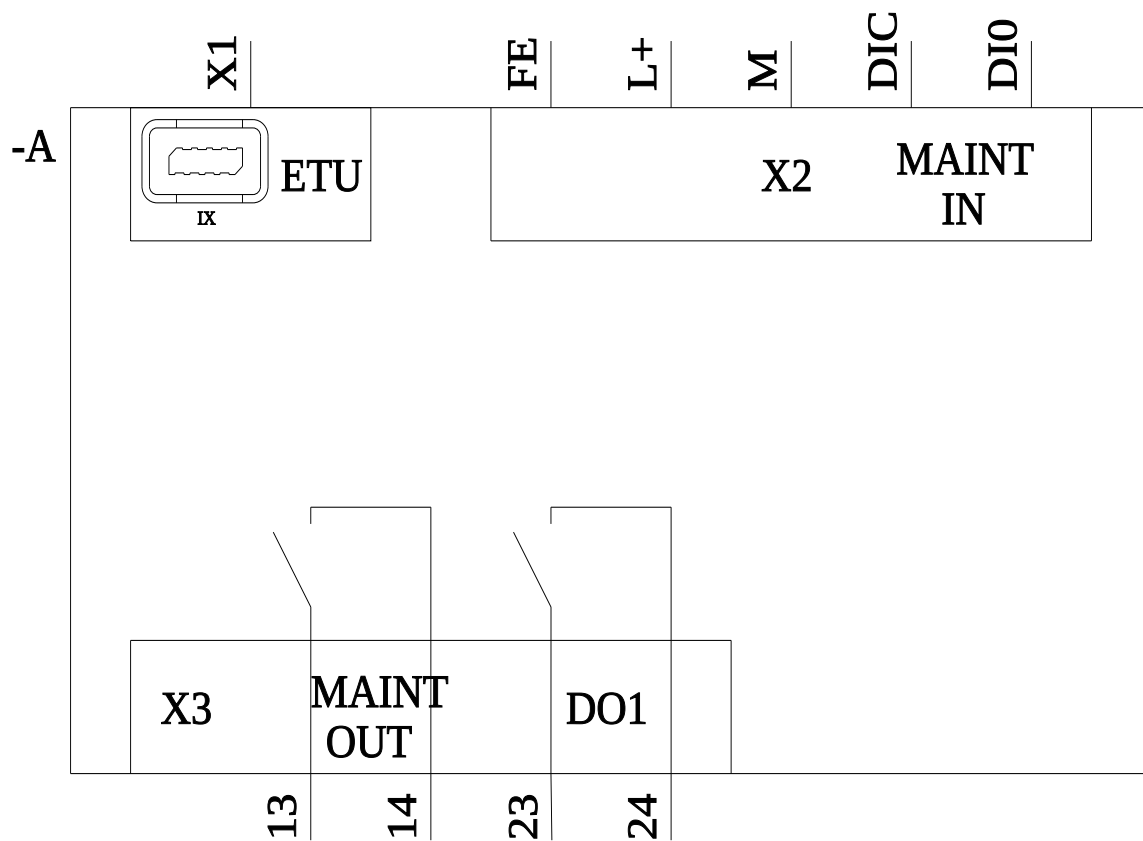

last modified:

7/18/2025

