



Accessory 3WA/3WL Closing coil (CC) / Shunt trip (ST), 100% OP 110-127 V AC / 110-125 V DC for continuous duty

Model	
product brand name	SENTRON
product designation	Closing coil/shunt trip
design of the product	closing coil (CC) / shunt release (ST) 100% OP, 110 to 127 V AC / 110 to 125 V DC, suitable for continuous duty
design of the fuse link	fuse gG: 2 A, miniature circuit breaker C characteristic: 2 A
closing apparent power [VA]	60 VA
operating apparent power [VA]	8 VA
closing active power [W]	60 W
operating active power [W]	8 W
minimum command time at $U_s = 100\%$	60 ms
make time (electrical) of circuit breaker at $U_s = 100\%$	80 ms
opening time (electrical) of circuit breaker at $U_s = 100\%$	80 ms
control supply voltage (U_s) at AC rated value	110 to 127 V 50/60 Hz
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates



[Type Test Certificates/Test Report](#)

Test Certificates	Maritime application	other	Dangerous goods
-------------------	----------------------	-------	-----------------

[Miscellaneous](#)

[Special Test Certificate](#)



[Confirmation](#)

[Transport Information](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD05

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

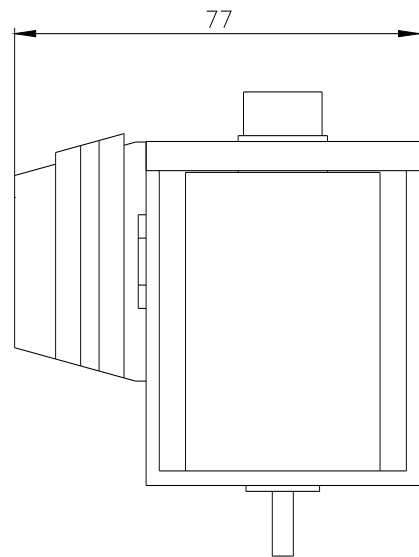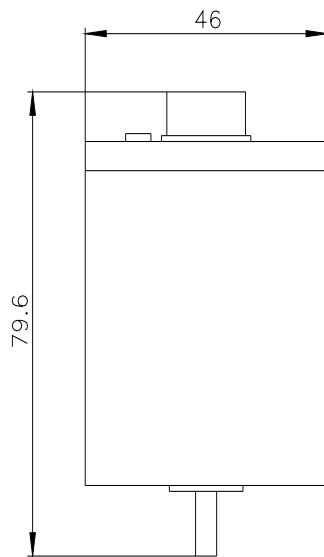

last modified:

4/4/2025 

