




Accessory 3WA/3WL Shunt trip (ST) 5% OP, 110-127 V AC / 110-125 V DC momentary duty, with cut-off switch, not for continuous duty

Model	
product brand name	SETRON
product designation	shunt release
design of the product	shunt release (ST) 5% OP, 110 to 127 V AC / 110 to 125 V DC for momentary duty, with cut-off switch, no continuous duty possible
design of the fuse link	fuse gG: 4 A, miniature circuit breaker C characteristic: 4 A
closing apparent power [VA]	300 VA
operating apparent power [VA]	300 VA
closing active power [W]	300 W
minimum command time at $U_s = 100\%$	60 ms
opening time (electrical) of circuit breaker at $U_s = 100\%$	50 ms
control supply voltage (U_s) at AC rated value	110 to 127 V 50/60 Hz
ambient temperature during operation	• minimum -40 °C • maximum 70 °C
ambient temperature during storage	• minimum -40 °C • maximum 80 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates

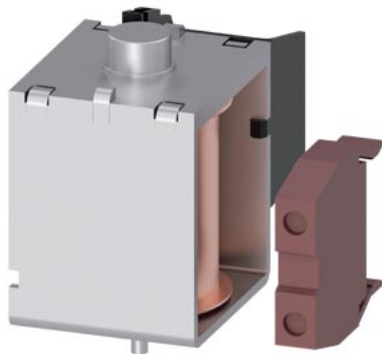

[Miscellaneous](#)

Test Certificates	Maritime application	other
-------------------	----------------------	-------

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



[Confirmation](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3WA9111-0AD25>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD25

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

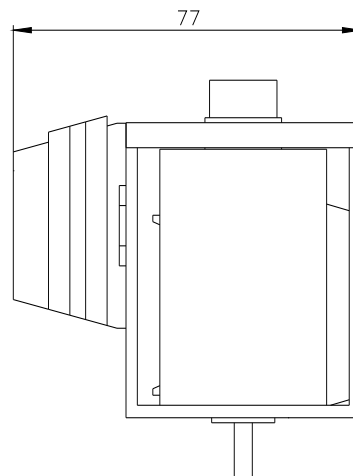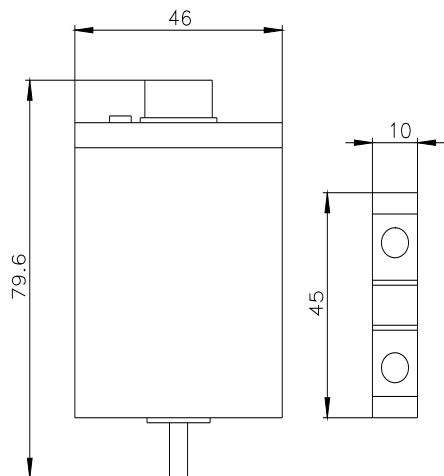

last modified:

4/13/2025 

