

Pin busbar, 16 mm² connection: 4x 3-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

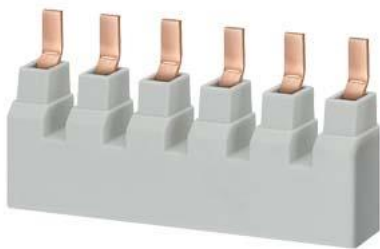


Figure similar

Model	
product brand name	SETRON
product designation	Pin busbar
General technical data	
phase number	3
Main circuit	
operational current rated value	80 A
Suitability	
suitability for interaction devices with auxiliary switch	No
suitability for interaction devices with N conductor	No
Appearance	
color	light grey
Product details	
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	No
Number	
number of devices suitable for fitting	4
Connections	
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
width	15 mm
length	205 mm
number of modular width units	12
cross-section	16 mm ²
net weight	156 g
Approvals Certificates	
General Product Approval	other





[Miscellaneous](#)



[Miscellaneous](#)

other	Environment
-------	-------------

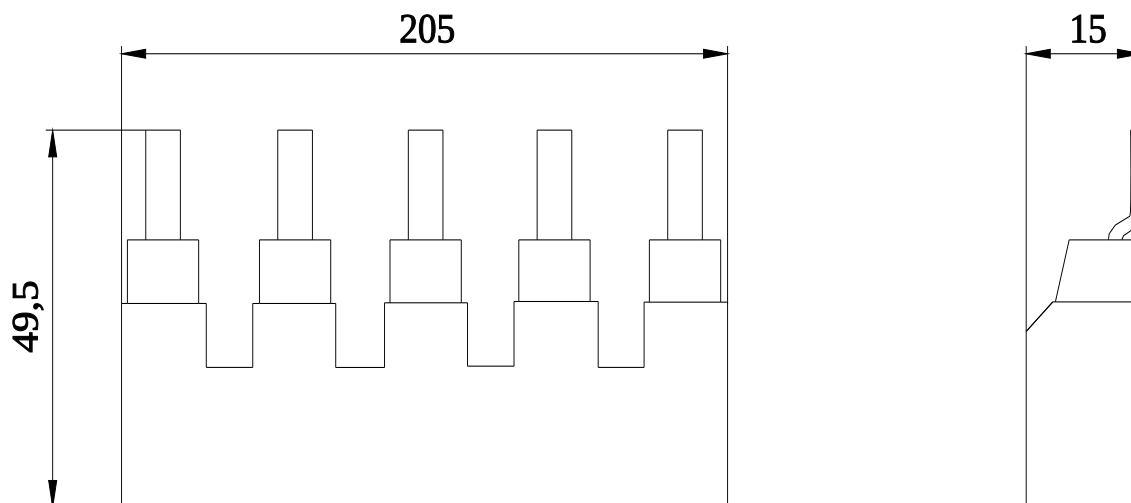Further information**Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3665-1HG>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/5ST3665-1HG>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3665-1HG**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**<http://www.siemens.com/specifications>



last modified:

1/29/2025 

