

Pin busbar, 16 mm<sup>2</sup> connection: 6x 3-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

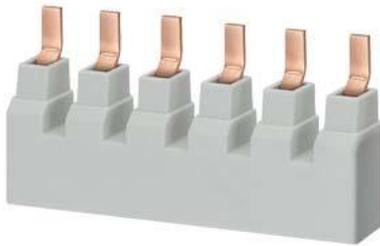


Figure similar

product brand name	SENTRON
product designation	Pin busbar
design of the product	6x 3PH
design of the phase tap	L1/L2/L3
<b>General technical data</b>	
compatibility	for 6 MCBs 3P
design of pole	3 poles
phase number	3
operational current rated value	80 A
suitability for interaction devices with auxiliary switch	No
suitability for interaction devices with N conductor	No
color	light grey
<b>Product details</b>	
product feature attachable arc fault detection device	No
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	No
number of devices suitable for fitting	6
type of electrical connection	Pin
<b>Mechanical Design</b>	
module width	18 mm
width	15 mm
length	310 mm
number of modular width units	17
cross-section	16 mm <sup>2</sup>
angle of the pin of busbar	0°
Net Weight	249 g
<b>Approvals Certificates</b>	
General Product Approval	other



[Miscellaneous](#)



other

Environment

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3665-2HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3665-2HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3665-2HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3665-2HG)


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

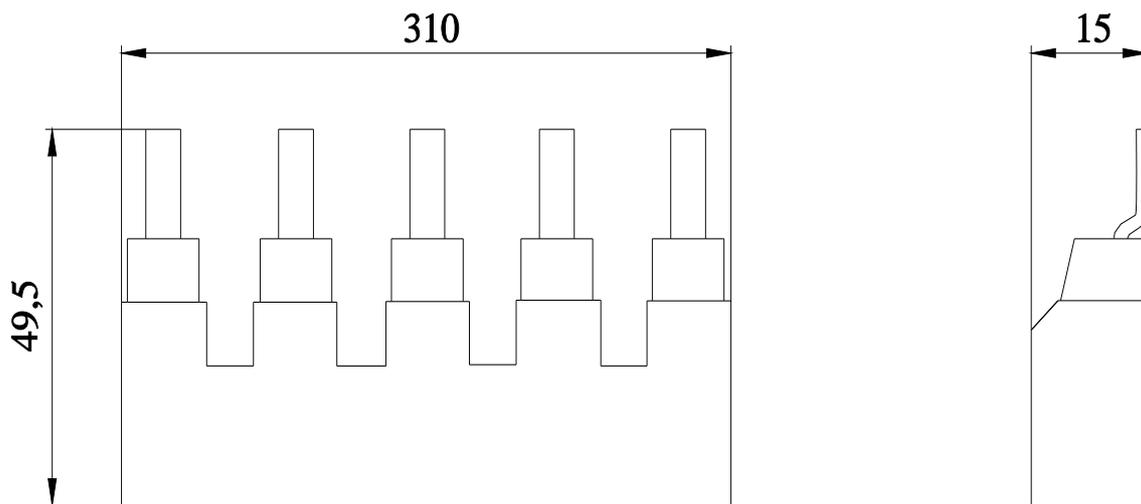



---

last modified:

8/8/2025 

