



Connection terminal 35mm² for pin busbars according to UL 508

Model		
product brand name	SENTRON	
product designation	Connecting terminal	
design of the product	for pin busbar 35 mm² UL508	
Supply voltage		
operating voltage at AC rated value	1 000 V	
Connections		
tightening torque		
• minimum	4 N·m	
• maximum	5.5 N·m	
type of connectable conductor cross-sections for copper conductor stranded	6 - 35 mm²	
Mechanical Design		
height	28.5 mm	
width	16.2 mm	
depth	41.5 mm	
length	60 mm	
net weight	33 g	
Approvals Certificates		
General Product Approval	other	Environment



[Miscellaneous](#)



[Confirmation](#)

[Miscellaneous](#)


[Environmental Con-
firmations](#)

Environment

[Environmental Con-
firmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3770-0HG>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/5ST3770-0HG>

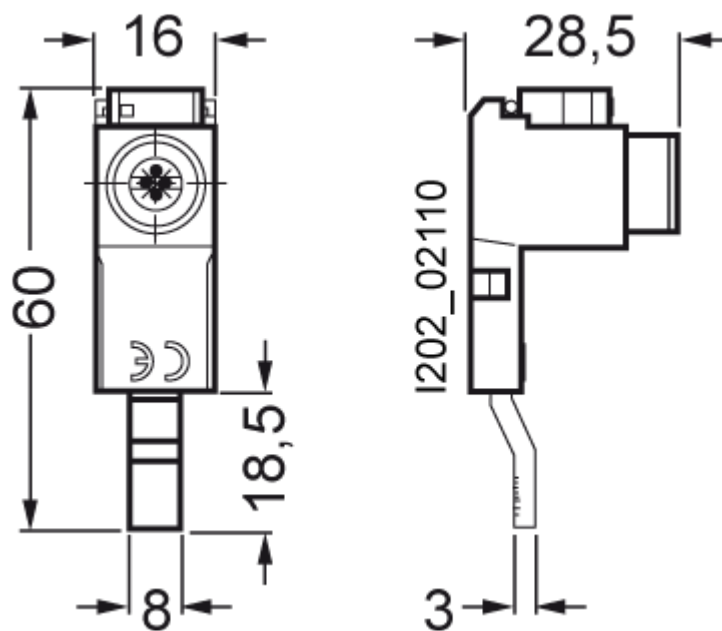

last modified:

4/11/2025 

