



busbar adapter 60 mm sys. UL 508 busbar system 60 mm busbar thickness: TT profile UL rating 240-600 V/540 A can be used in feeder circuits for 3VL circuit breakers with pipe contacting for cable outlet top/bottom adapter length 296 mm adapter width 140 mm for VL400 UL, JG frame, for VL400X UL, LG frame

Model	
product brand name	SENTRON
product designation	Device adapter
design of the product	Accessories
Connections	
type of electrical connection	Tubular contacts
Mechanical Design	
height	295 mm
width of the adapter	140 mm
depth	88 mm
thickness of the busbar	
• minimum	5 mm
busbar center-to-center spacing	60 mm
Net Weight	2.466 kg

Approvals Certificates	
General Product Approval	Test Certificates





[Miscellaneous](#)

Maritime application	other	Environment			
		<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>	<a href="#">Environmental Con- firmations</a>	<a href="#">Environmental Con- firmations</a>

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1213-4AH00>  
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/8US1213-4AH00>  
 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1213-4AH00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1213-4AH00)  
 CAx-Online-Generator  
<http://www.siemens.com/cax>  
 Tender specifications

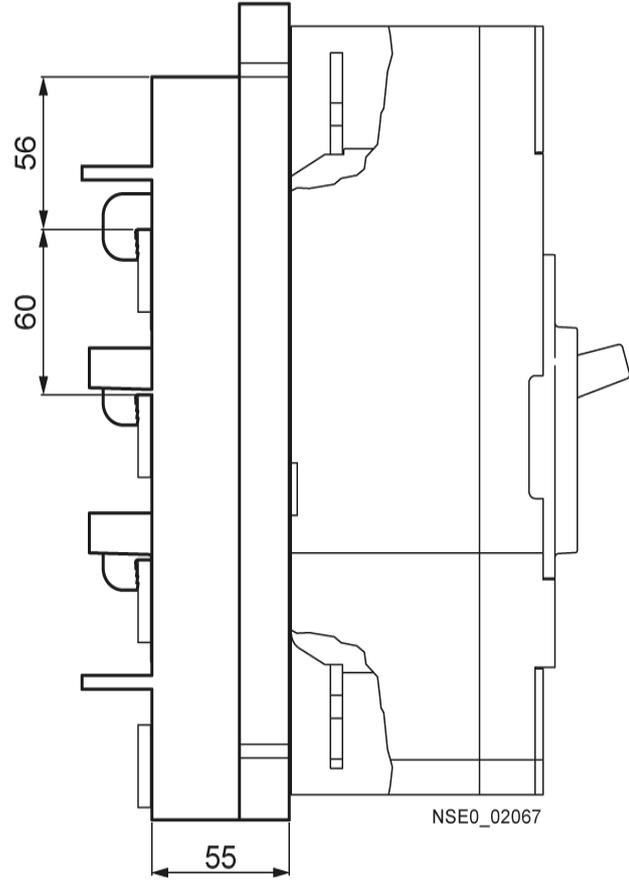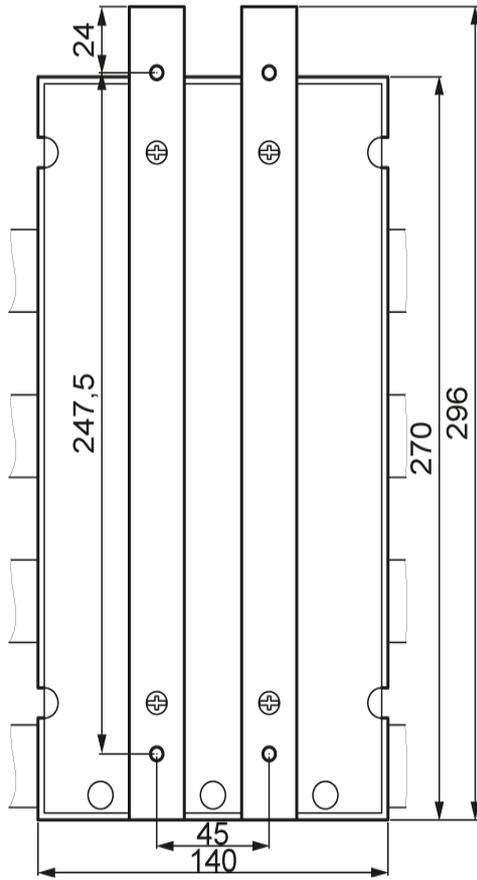

last modified:

4/8/2025 

