

busbar system, accessory busbar center-to-center spacing 40, 60 mm connection terminal busbar thickness: 5 mm 1.5-16 mm<sup>2</sup>

Model		
product brand name	SETRON	
product designation	Connecting terminal	
design of the product	Accessories	
Supply voltage		
operating voltage at AC rated value	690 V	
Dissipation		
power loss [W]	0 W	
suitability for use	for busbars 12, 15, 20, 25, 30 x 5 mm and mounting rails	
according UL		
operational current according to UL 508 rated value	65 A	
Connections		
type of connectable conductor cross-sections for AWG cables	AWG 166	
type of connectable conductor cross-sections for copper conductor stranded	1.5-16 mm <sup>2</sup>	
type of connectable conductor cross-sections of the laminated conductor rails	Cu lam. 8x6x0.5 mm	
Mechanical Design		
net weight	21 g	
Approvals Certificates		
General Product Approval	Test Certificates	other



[Miscellaneous](#)

[Confirmation](#)

other	Environment
<a href="#">Miscellaneous</a>	<a href="#">Environmental Confirmations</a>
	<a href="#">Environmental Confirmations</a>

**Further information**

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
 Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=8US1921-2AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1921-2AA00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1921-2AA00)

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

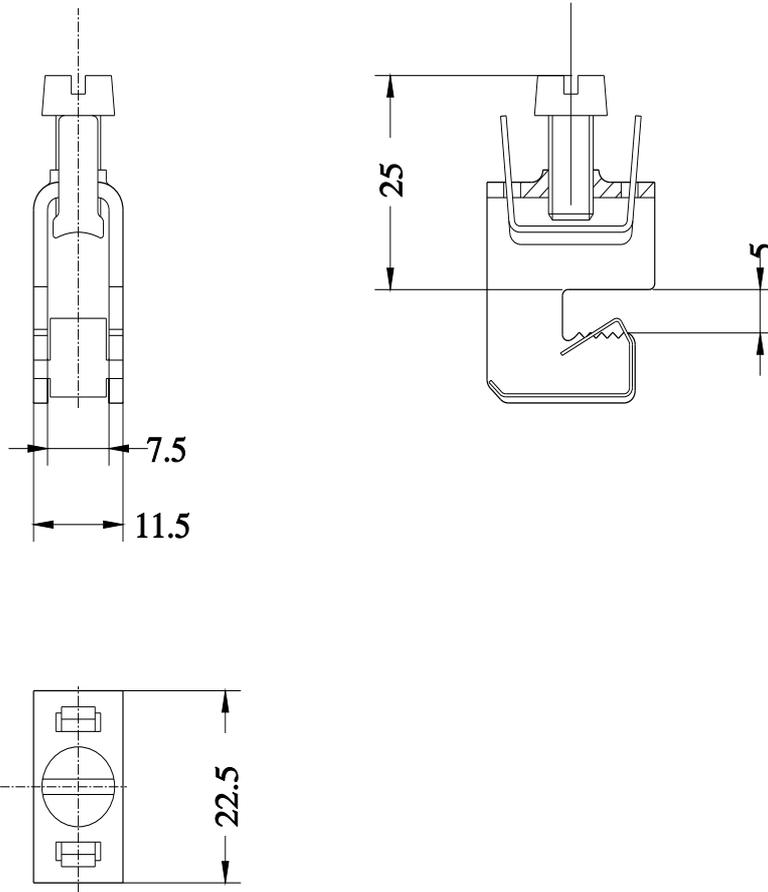

---

last modified:

4/11/2025 

