

busbar system, accessory busbar center-to-center spacing 40, 60 mm connection  
terminal busbar thickness: 5 mm 1.5-16 mm<sup>2</sup>

| Model                                                                         |  |                                                          |       |
|-------------------------------------------------------------------------------|--|----------------------------------------------------------|-------|
| product brand name                                                            |  | SENTRON                                                  |       |
| product designation                                                           |  | Connecting terminal                                      |       |
| design of the product                                                         |  | Accessories                                              |       |
| Supply voltage                                                                |  |                                                          |       |
| operating voltage at AC rated value                                           |  | 690 V                                                    |       |
| Dissipation                                                                   |  |                                                          |       |
| power loss [W]                                                                |  | 0 W                                                      |       |
| suitability for use                                                           |  | for busbars 12, 15, 20, 25, 30 x 5 mm and mounting rails |       |
| according UL                                                                  |  |                                                          |       |
| operational current according to UL 508 rated value                           |  | 65 A                                                     |       |
| Connections                                                                   |  |                                                          |       |
| type of connectable conductor cross-sections for AWG cables                   |  | AWG 166                                                  |       |
| type of connectable conductor cross-sections for copper conductor stranded    |  | 1.5-16 mm²                                               |       |
| type of connectable conductor cross-sections of the laminated conductor rails |  | Cu lam. 8x6x0.5 mm                                       |       |
| Mechanical Design                                                             |  |                                                          |       |
| Net Weight                                                                    |  | 21 g                                                     |       |
| Approvals Certificates                                                        |  |                                                          |       |
| General Product Approval                                                      |  | Test Certificates                                        | other |



[Miscellaneous](#)



| other                         | Environment                                 |
|-------------------------------|---------------------------------------------|
| <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a>                |
|                               | <a href="#">Environmental Confirmations</a> |
|                               | <a href="#">Environmental Confirmations</a> |

| Further information                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                                 |
| Information- and Downloadcenter (Catalogs, Brochures,...)<br><a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>                                                        |
| Industry Mall (Online ordering system)<br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2AA01">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2AA01</a> |

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1921-2AA01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1921-2AA01)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

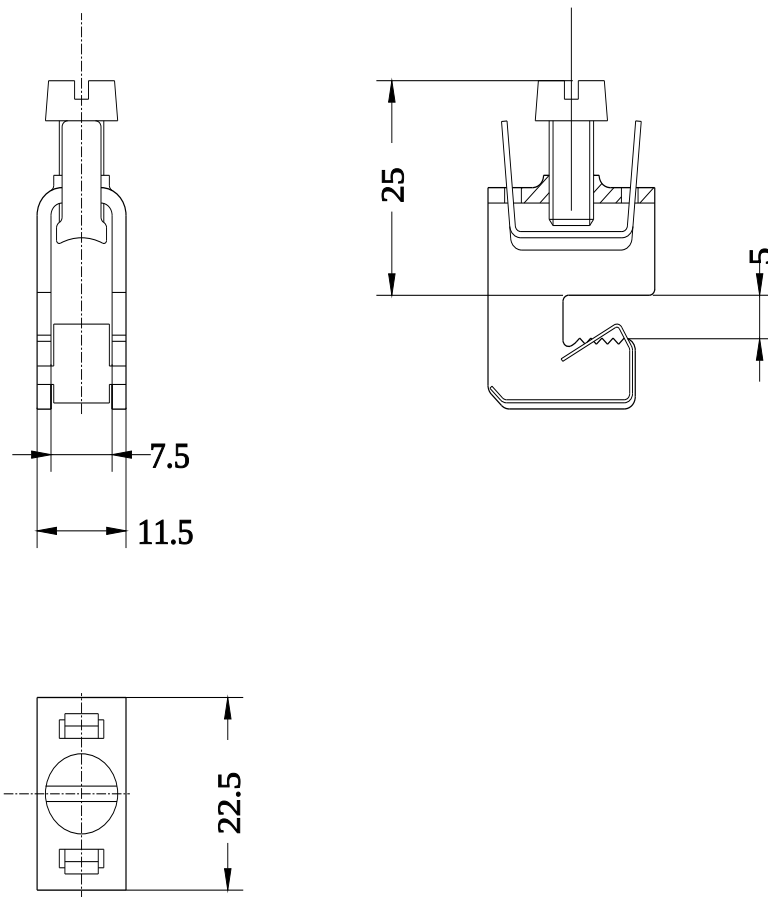

last modified:

4/11/2025 

