



busbar system, accessory busbar center-to-center spacing 40, 60 mm connection
terminal busbar thickness: 10 mm+TT profile 4-35 mm²

Model			
product brand name		SENTRON	
product designation		Connecting terminal	
design of the product		Accessories	
Supply voltage			
operating voltage at AC rated value		690 V	
Dissipation			
power loss [W]		0 W	
suitability for use		for busbars 12, 15, 20, 25, 30 x 10 mm and mounting rails	
according UL			
operational current according to UL 508 rated value		115 A	
Connections			
type of connectable conductor cross-sections for AWG cables		AWG 102	
type of connectable conductor cross-sections for copper conductor stranded		4-35 mm²	
type of connectable conductor cross-sections of the laminated conductor rails		Cu lam. 3x9x0.8 mm or 6x9x0.8 mm	
Mechanical Design			
Net Weight		48 g	
Approvals Certificates			
General Product Approval		Test Certificates	other



[Miscellaneous](#)



other	Environment
Miscellaneous	Confirmation
	Environmental Confirmations
	Environmental Confirmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2BB00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2BB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1921-2BB00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

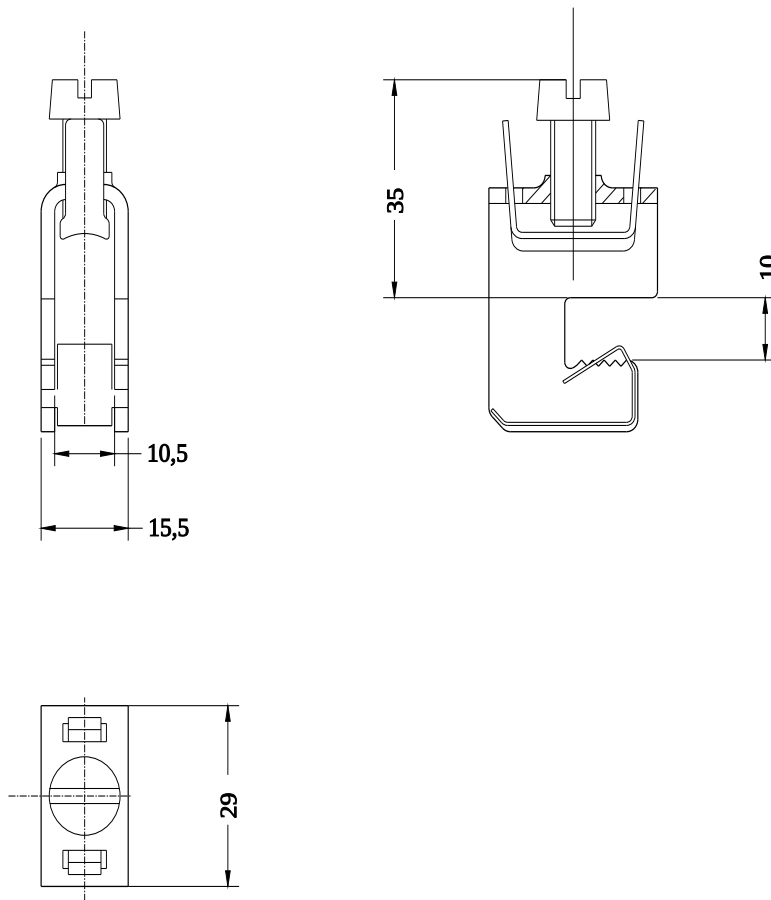

last modified:

4/11/2025 

