



Busbar system, accessories Busbar center-to-center spacing 40, 60 mm
Connection terminal Bar thickness: 10 mm+TT profile 16-120 mm²

Model	
product brand name	SETRON
product designation	Connecting terminal
design of the product	Accessories
Supply voltage	
operating voltage at AC rated value	690 V
Dissipation	
power loss [W]	0 W
suitability for use	for busbars 12, 15, 20, 25, 30 x 10 mm and mounting rails
according UL	
operational current according to UL 508 rated value	255 A
Connections	
type of connectable conductor cross-sections for AWG cables	WAG 4MCM 250
type of connectable conductor cross-sections for copper conductor stranded	16-120 mm ²
type of connectable conductor cross-sections of the laminated conductor rails	Cu lam. 2x9x0.8 mm or 6x15.5x0.8 mm or 10x15.5x0.5 mm
Mechanical Design	
net weight	107 g
Approvals Certificates	
General Product Approval	
Test Certificates	



[Confirmation](#)



[Miscellaneous](#)

other	Environment
Miscellaneous	Confirmation
	Environmental Con- firmations
	Environmental Con- firmations

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>
 Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1921-2BC00>
 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1921-2BC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1921-2BC00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

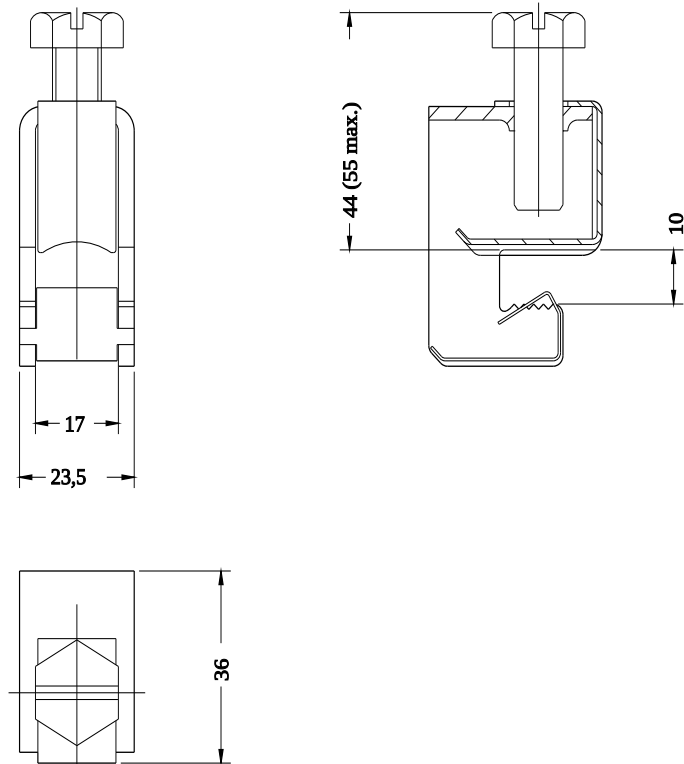

01 203

last modified:

7/9/2022 

