



busbar system, accessory busbar center-to-center spacing 60 mm busbar support 3-pole for busbars 12x 5 (10)-30x 5 (10) external fixing width: 20 mm

Model		
product brand name	SENTRON	
product designation	busbar support	
operating voltage at AC rated value	690 V	
suitability for use	Flat bars	
type of connectable conductor cross-sections for copper conductor stranded	12 mm x 5 mm - 30 mm x 10 mm	
Mechanical Design		
width	20 mm	
busbar center-to-center spacing	60 mm	
Net Weight	153 g	
Approvals Certificates		
General Product Approval	Test Certificates	other




[Miscellaneous](#)



other	Environment
<p>Confirmation</p> <p>Miscellaneous</p>	<p>Environmental Confirmations</p> <p>Environmental Confirmations</p>

Further information
<p>Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875</p> <p>Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs</p> <p>Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1923-2AA01</p> <p>Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/8US1923-2AA01</p> <p>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1923-2AA01</p> <p>CAX-Online-Generator http://www.siemens.com/cax</p> <p>Tender specifications http://www.siemens.com/specifications</p>

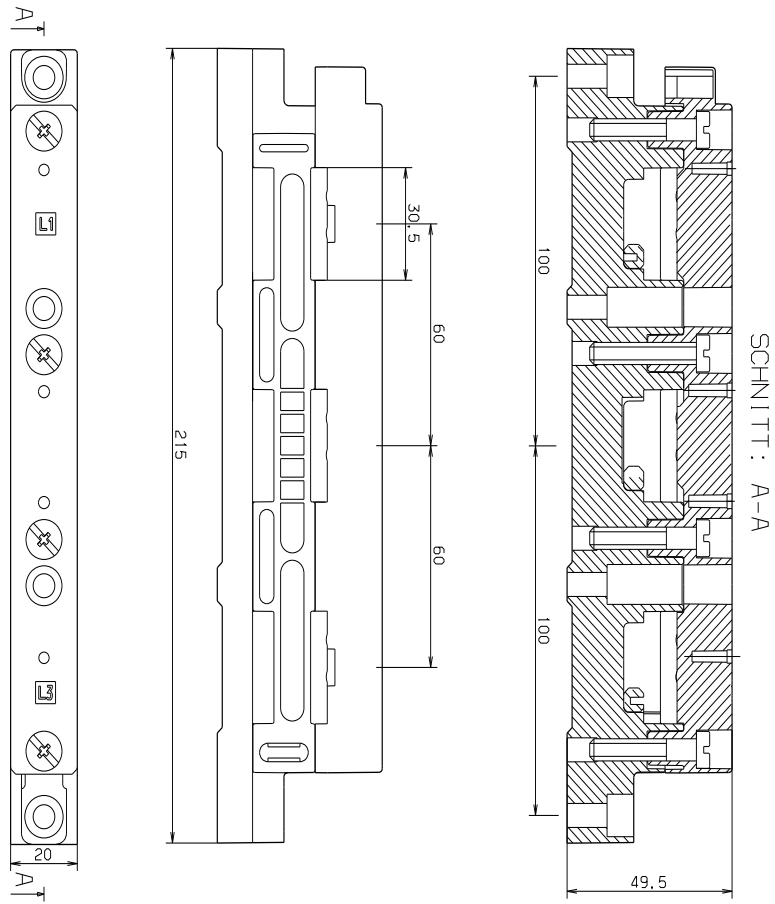

last modified:

4/11/2025 

