



busbar system, accessory busbar center-to-center spacing 60 mm busbar support 3-pole for busbars 12x 5 (10)-30x 5 (10) internal fixing width: 20 mm

Model	
product brand name	SENTRON
product designation	busbar support
operating voltage at AC rated value	690 V
suitability for use	Flat bars
type of connectable conductor cross-sections for copper conductor stranded	12 mm x 5 mm - 30 mm x 10 mm
Mechanical Design	
width	20 mm
busbar center-to-center spacing	60 mm
Net Weight	148 g
Approvals Certificates	
General Product Approval	Test Certificates
	other



[Miscellaneous](#)



other	Environment
-------	-------------

[Miscellaneous](#)


[Confirmation](#)

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

### Further information

- Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1923-3AA01>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/8US1923-3AA01>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8US1923-3AA01](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1923-3AA01)
- CAX-Online-Generator  
<http://www.siemens.com/cax>
- Tender specifications  
<http://www.siemens.com/specifications>

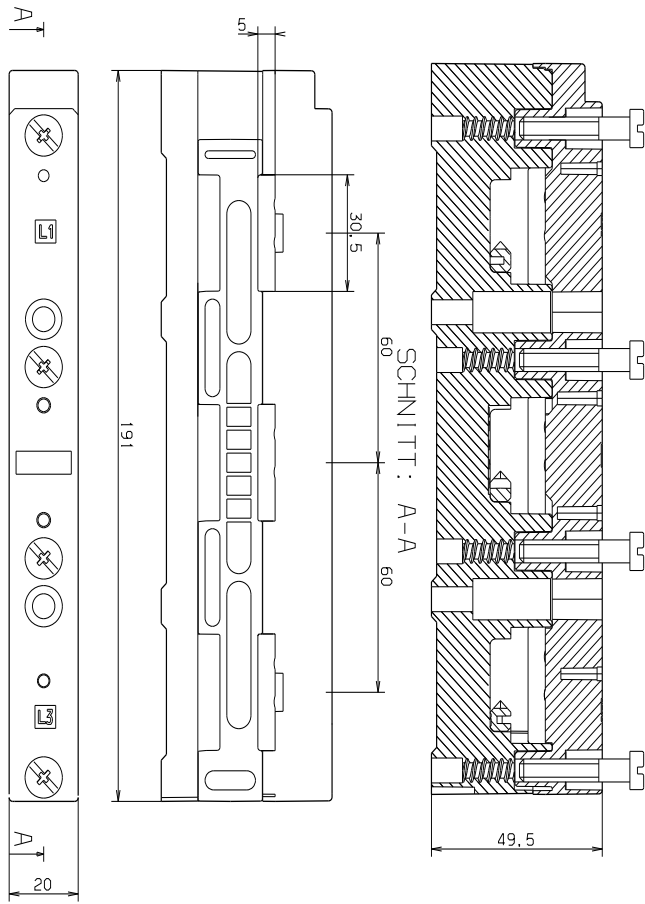

last modified:

4/11/2025 

