

LED, Base BA 15d, red, 115 V AC, accessory for signaling columns, with diameters 50 mm and 70 mm



Figure similar

<b>product brand name</b>	SIRIUS	
<b>product designation</b>	LED	
<b>General technical data</b>		
<b>type of voltage of the operating voltage</b>	AC	
<b>operating voltage</b>		
• 1 at AC at 50 Hz rated value	115 V	
• 1 at AC at 60 Hz rated value	115 V	
<b>relative positive tolerance of the operating voltage</b>	10 %	
<b>relative negative tolerance of the operating voltage</b>	-15 %	
reference code according to EN 61346-2	P	
<b>Lamp</b>		
<b>type of light source</b>	LED	
<b>light intensity</b>	2.88 cd	
<b>socket design</b>	BA 15d	
<b>Enclosure</b>		
<b>height</b>	45 mm	
<b>width</b>	20 mm	
<b>outer diameter of the signal column element</b>	70 mm	
<b>color</b>	red	
<b>Ambient conditions</b>		
<b>ambient temperature during operation</b>	-20 ... +60 °C	
<b>Approvals Certificates</b>		
<b>General Product Approval</b>	EMV	other



EG-Konf.



[Confirmation](#)



[Confirmation](#)

### Environment

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4448-6XB>

Cax online generator

<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mlfb=8WD4448-6XB>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4448-6XB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4448-6XB&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4448-6XB&lang=en)

**-P**

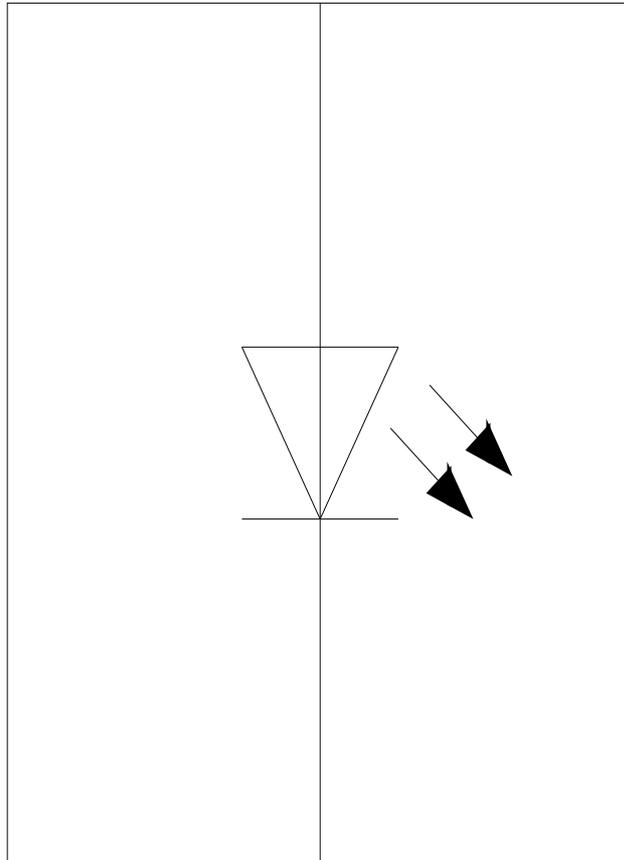

last modified:

12/23/2020 