



plug-in relay complete unit, 4 changeover contacts, 24 V DC, LED module green, standard plug-in socket screw terminal, 3.5 mm pinning

product brand name	SIRIUS
product designation	Coupling relay with plug-in relay
product type designation	LZS
General technical data	
display version LED	Yes
consumed active power	1 W
percental drop-out voltage related to the input voltage	10 %
operating frequency without load	36 000 1/h
operating frequency with load	360 1/h
switching behavior	monostable
mechanical service life (operating cycles) typical	30 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	250 000
thermal current	6 A
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/01/2012
Net Weight	0.102 kg
Control circuit/ Control	
control supply voltage at DC rated value	24 V
control supply voltage at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.9
• full-scale value	1.4
closing delay	
• at DC maximum	15 ms
opening delay	
• at DC maximum	18 ms
Switching Function	
design of the switching function	changeover switch
Mechanical data	
product component plug-in socket	Yes
design of the snap-on socket base	Standard socket
design of the relay operating mechanism	poled
Short-circuit protection	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gG: 6 A
Auxiliary circuit	
type of switching contact	Changeover contact
material of switching contacts	AgNi 90/10

number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		0
number of CO contacts for auxiliary contacts		4
operational current of auxiliary contacts at AC-15		
• at 250 V		4 A
operational current at DC-13 at 24 V rated value		4 A
operational current of auxiliary contacts at DC-13		
• at 24 V		4 A
Main circuit		
type of voltage		DC
ampacity of the output relay at DC-13		
• at 24 V		4 A
Display		
display version as status display by LED		LED green
Connections/ Terminals		
product function removable terminal		No
type of electrical connection		screw terminal
type of connectable conductor cross-sections		
• solid		1x (1,0 ... 2,5), 2x 1,0, 2x 1,5, 2x 2,5
• finely stranded with core end processing		1x (1.0 ... 1.5), 2x 1.0, 2x 1.5
• for AWG cables solid		1x (18 ... 14), 2x 18, 2x 16, 2x 14
connectable conductor cross-section		
• solid		1 ... 2.5 mm²
• finely stranded with core end processing		1 ... 1.5 mm²
AWG number as coded connectable conductor cross section		
• solid		18 ... 14
• stranded		18 ... 14
tightening torque with screw-type terminals		0.5 ... 0.7 N·m
Installation/ mounting/ dimensions		
mounting position		any
fastening method		snap-on mounting
height		74 mm
width		27 mm
depth		72 mm
Ambient conditions		
ambient temperature		
• during operation		-40 ... +70 °C
• during storage		-25 ... +70 °C
• during transport		-25 ... +70 °C
Approvals Certificates		
Environment	General Product Approval	other

[Environmental Confirmations](#)



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT5A5L24A>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT5A5L24A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5A5L24A>

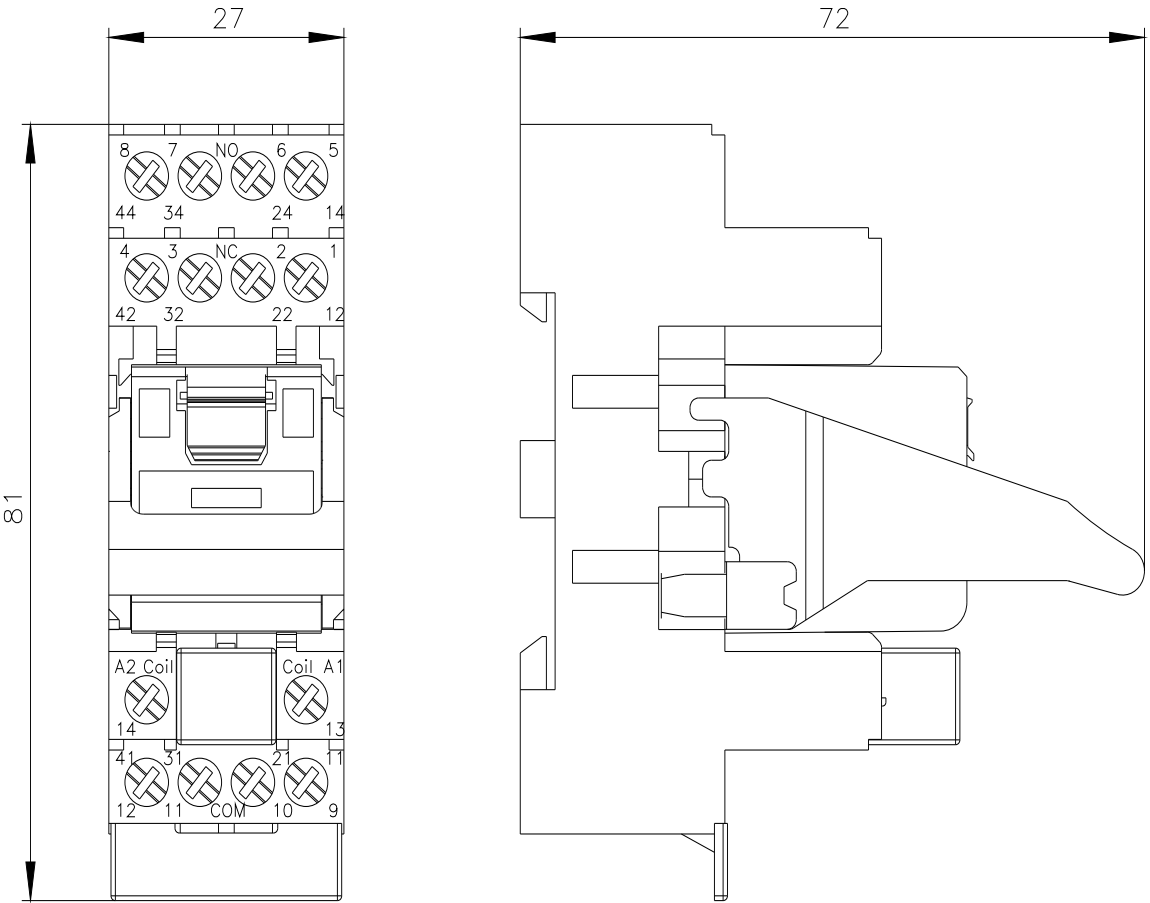

last modified:

4/2/2025