

# Product data sheet

Specifications

SQUARE D



Transformer, dry type, encapsulated, 15kVA, 3 phase, 480V primary, 208Y/120V secondary, 14C, 115C rise [TAA]

15T2F

Product availability: Stock - Normally stocked in distribution facility

## Main

Product or Component Type	Dry Sealed Transformer
Primary to Secondary Voltage	480 V delta 208Y/120 V
Full Capacity Taps	2 5 % FCBN

## Complementary

Enclosure Code	14C
Phase	3 phase
Power Rating	15 kVA
Temperature rise	115 °C
Height	14.75 in (374.65 mm)
Width	19.1 in (485.1 mm)
Depth	12.25 in (311.15 mm)
Enclosure mounting	Wall mounted
Net Weight	300 lb(US) (136.08 kg) 300.005 lb(US) (136.08 kg)
Enclosure Material	Painted sheet steel

## Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product Certifications	UL Listed cULus CSA

## Ordering and shipping details

Category	US10PE216277
Discount Schedule	0PE2
GTIN	785901359500
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	14.10 in (35.81 cm)
<b>Package 1 Width</b>	15.30 in (38.86 cm)
<b>Package 1 Length</b>	19.10 in (48.51 cm)
<b>Package weight(Lbs)</b>	323.00 lb(US) (146.51 kg)

---

## Compliance

---

<b>Compliance</b>	TAA
-------------------	-----

## Contractual warranty

---

<b>Warranty</b>	18 months
-----------------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

PVC free

Yes

## Use Again

### Repack and remanufacture

Circularity Profile

No need of specific recycling operations


Take-back

No

Technical Illustration

Dimensions

---

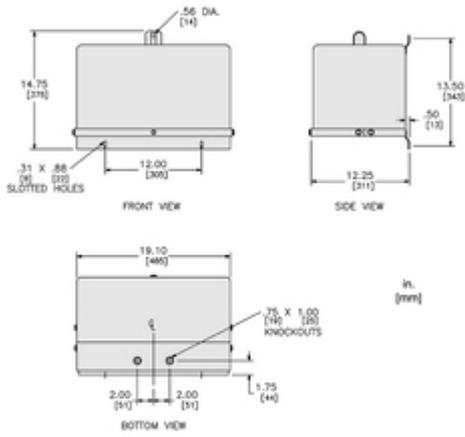


ALL DIMENSIONS ARE APPROXIMATE.  
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

---

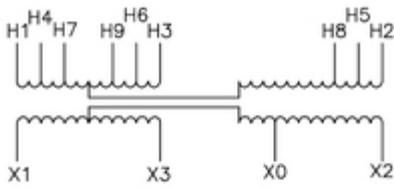

9T2F  
15T2F  
2 - 5% FCBN

480 DELTA - 208Y/120 CONNECT TO TAPS		
PRIMARY VOLTS	2-5% FCBN	2-2.5% FCAN 2-2.5% FCBN
504	-	H1, H2, H3
492	-	H4, H5, H6
480	H1, H2, H3	H7, H8, H9
468	-	H10, H11, H12
456	H4, H5, H6	H13, H14, H15
432	H7, H8, H9	-