

Product data sheet

Specifications

SQUARE D



Transformer, dry type,
encapsulated, 15kVA, 3 phase,
480V primary, 208Y/120V
secondary, 14C, 115C rise [TAA]

15T68F

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type Dry type transformer

Ordering and shipping details

Category US10PE216277

Discount Schedule 0PE2

GTIN 785901359517

Returnability Yes

Country of origin MX

Packing Units

Unit Type of Package 1 PCE

Nbr. of units in pkg. 1

Package 1 Height 27.00 in (68.58 cm)

Package 1 Width 16.13 in (40.97 cm)

Package 1 Length 20.00 in (50.8 cm)

Package weight(Lbs) 326.00002 lb(US) (147.871 kg)

Unit Type of Package 2 PAL

Number of Units in Package 2 6

Package 2 Height 40.00 in (101.6 cm)

Package 2 Width 40.00 in (101.6 cm)

Package 2 Length 48.00 in (121.92 cm)

Package 2 Weight 1957.759 lb(US) (888.024 kg)

Compliance

Compliance TAA

Contractual warranty

Warranty 18 months

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration


Dimensions

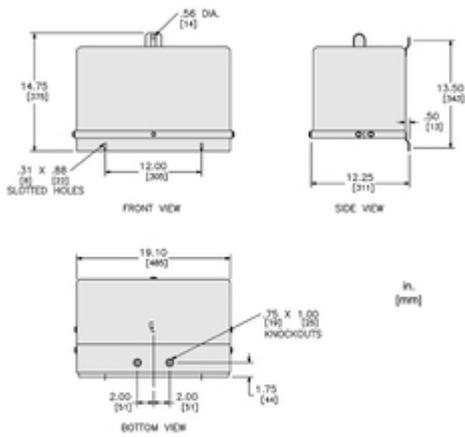

ALL DIMENSIONS ARE APPROXIMATE.
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

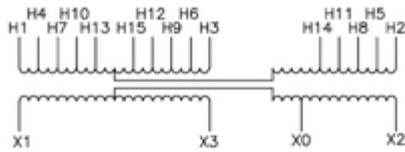

15T68F

4 - 2.5%, 2 FCAN AND 2 FCBN

480 DELTA - 208Y/120 CONNECT TO TAPS		
PRIMARY VOLTS	2-5% FCBN	2-2.5% FCAN 2-2.5% FCBN
504	-	H1, H2, H3
492	-	H4, H5, H6
480	H1, H2, H3	H7, H8, H9
468	-	H10, H11, H12
456	H4, H5, H6	H13, H14, H15
432	H7, H8, H9	-