

# Product data sheet

Specifications

SQUARE D



Switch, manual, 30A, 3 pole, 10 HP at 575 VAC, three phase, toggle operated, no indicator, NEMA 1 enclosure

2510KG2

Product availability: Stock - Normally stocked in distribution facility

## Main

Product	Single Unit Manual Switch
Type	K

## Complementary

Current Rating	30 A
Cable Entry	0.5" and 0.75" knock-outs (top and bottom)
Horsepower Rating	2 hp 115 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC 7.5 hp 230 V AC 10 hp 460 V AC 10 hp 575 V AC
Maximum Voltage Rating	600 V AC 230 V DC
Number of Poles	3P
Control Unit Type	Toggle
Number of Phases	3 phase
Pilot Light	No indicator
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14...AWG 10 copper
Height	4.25 in (107.95 mm)
Width	2.44 in (61.98 mm)
Depth	2.75 in (69.85 mm)
Net Weight	0.84 lb(US) (0.38 kg)

## Environment

Certifications	UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05
NEMA Enclosure Rating	NEMA 1 Plastic standard size

## Ordering and shipping details

Category	US10CP121102
Discount Schedule	0CP1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>GTIN</b>	785901554509
<b>Returnability</b>	Yes
<b>Country of origin</b>	MX

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	2.90 in (7.366 cm)
<b>Package 1 Width</b>	2.70 in (6.858 cm)
<b>Package 1 Length</b>	4.80 in (12.192 cm)
<b>Package weight(Lbs)</b>	13.4 oz (381 g)
<b>Unit Type of Package 2</b>	CAR
<b>Number of Units in Package 2</b>	21
<b>Package 2 Height</b>	8.80 in (22.352 cm)
<b>Package 2 Width</b>	8.40 in (21.336 cm)
<b>Package 2 Length</b>	14.50 in (36.83 cm)
<b>Package 2 Weight</b>	18.140 lb(US) (8.228 kg)
<b>Unit Type of Package 3</b>	PAL
<b>Number of Units in Package 3</b>	576
<b>Package 3 Height</b>	40.00 in (101.6 cm)
<b>Package 3 Width</b>	40.00 in (101.6 cm)
<b>Package 3 Length</b>	48.00 in (121.92 cm)
<b>Package 3 Weight</b>	490.00 lb(US) (222.26 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Not compliant
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
PVC free	Yes


### Use Again

 <b>Repack and remanufacture</b>	
Take-back	No

Technical Illustration

Dimensions

---

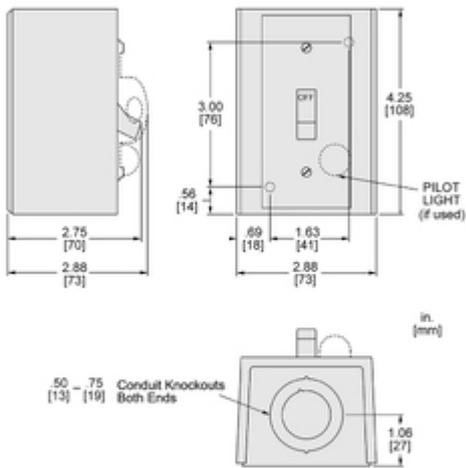


ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

---

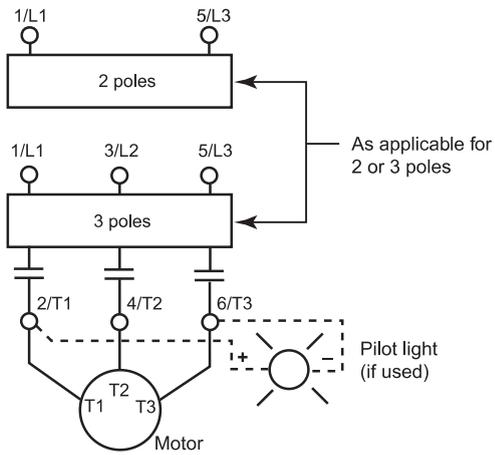

**NOTE:** The lamp is polarity sensitive in DC applications.