

Product data sheet

Specifications

SQUARE D



Switch, manual, 30A, 3 pole, 10 HP at 575 VAC, three phase, toggle operated, no indicator, NEMA 7/9, one conduit opening

2510KR2

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Unit Manual Switch
Type	K

Complementary

Current Rating	20 A
Cable Entry	0.75 NPT (bottom)
Horsepower Rating	2 hp 115 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC 7.5 hp 230 V AC 10 hp 460 V AC 10 hp 575 V AC
Maximum Voltage Rating	600 V AC 230 V DC
Number of Poles	3P
Control Unit Type	Toggle
Number of Phases	3 phase
Pilot Light	No indicator
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14...AWG 10 copper
Height	6.36 in (161.54 mm)
Width	3.95 in (100.33 mm)
Depth	4.35 in (110.49 mm)

Environment

Certifications	UL listed file E58760 CCN NPXZ CSA LR26817 class 3218 04
NEMA Enclosure Rating	NEMA 3R/7/9 Cast Aluminium standard size

Ordering and shipping details

Category	US10CP121102
Discount Schedule	0CP1
GTIN	785901077725

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Returnability	Yes
----------------------	-----

Country of origin	MX
--------------------------	----

Packing Units

Unit Type of Package 1	PCE
-------------------------------	-----

Nbr. of units in pkg.	1
------------------------------	---

Package 1 Height	4.600 in (11.684 cm)
-------------------------	----------------------

Package 1 Width	5.500 in (13.970 cm)
------------------------	----------------------

Package 1 Length	7.000 in (17.780 cm)
-------------------------	----------------------

Package weight(Lbs)	3.549 lb(US) (1.610 kg)
----------------------------	-------------------------

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 59

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

EU RoHS Directive Not compliant

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

PVC free Yes

Use Again

Repack and remanufacture


Circularity Profile No need of specific recycling operations

Take-back No

WEEE Label  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Wiring diagram

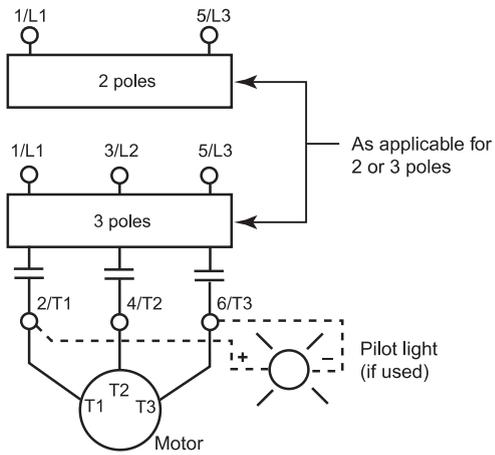

NOTE: The lamp is polarity sensitive in DC applications.