

Product data sheet

Specifications

SQUARE D



Switch, manual, 30A, 2 pole, 3 HP at 575 VAC, single phase, toggle operated, red 115 VAC indicator, NEMA 4, one conduit

2510KW1A

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Unit Manual Switch
Type	K

Complementary

Current Rating	30 A
Cable Entry	0.75 NPT (bottom)
Horsepower Rating	2 hp 115 V AC 2 hp 230 V AC 3 hp 460 V AC 3 hp 575 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC
Maximum Voltage Rating	600 V AC 230 V DC
Number of Poles	2P
Control Unit Type	Toggle
Number of Phases	1 phase
Pilot Light	Red indicator, 115 V
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14...AWG 10 copper
Height	4.38 in (111.25 mm)
Width	3 in (76.2 mm)
Depth	4.56 in (115.82 mm)

Environment

Certifications	UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05
NEMA Enclosure Rating	NEMA 4 die cast zinc alloy standard size

Ordering and shipping details

Category	US10CP121102
Discount Schedule	0CP1
GTIN	785901077749

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.800 in (9.652 cm)
Package 1 Width	4.800 in (12.192 cm)
Package 1 Length	5.400 in (13.716 cm)
Package weight(Lbs)	2.970 lb(US) (1.347 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	8.800 in (22.352 cm)
Package 2 Width	8.200 in (20.828 cm)
Package 2 Length	14.50 in (36.83 cm)
Package 2 Weight	15.430 lb(US) (6.999 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	336
Package 3 Height	40.0 in (101.6 cm)
Package 3 Width	40.0 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	1005.00009 lb(US) (455.86 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) 42

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard No

Packaging without single use plastic No

EU RoHS Directive Not compliant

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

PVC free Yes

Use Again


Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No

Technical Illustration

Wiring diagram

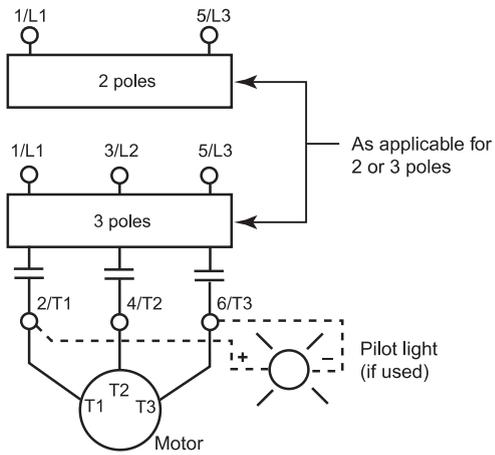

NOTE: The lamp is polarity sensitive in DC applications.