

Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 30A, 2 pole, 5HP at 230VAC, 1 phase, 110/120VAC 50/60Hz coil, open, DIN rail mount

8910DPA32V02Y135

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------|----------------------------|
| Product or Component Type | Definite Purpose Contactor |
| Line Rated Current | 30 A |
| Number of Poles | 2P |
| Pole contact composition | 2 NO |
| Range of Product | DPA |

Complementary

| | |
|--------------------------------|--|
| Maximum Horse Power Rating | 2 hp 115 V AC, 1 phase 5 hp 230 V AC, 1 phase |
| Locked rotor rated current | 150 A 460 V AC 120 A 575 V AC 180 A 277 V AC |
| [Ue] rated operational voltage | 600 V AC |
| [Uc] control circuit voltage | 120 V AC 60 Hz 110 V AC 50 Hz |
| Phase | 1 phase |
| Electrical Connection | Binder head Quick connect terminals |
| Mounting Support | 35 mm DIN rail |

Environment

| | |
|------------------------|----------------------|
| Product Certifications | UL Recognized CSA |
|------------------------|----------------------|

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US1CP1B21343 |
| Discount Schedule | CP1B |
| GTIN | 785901613497 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
| Nbr. of units in pkg. | 1 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|-------------------------------------|-------------------------|
| Package 1 Height | 2.40 in (6.096 cm) |
| Package 1 Width | 3.60 in (9.144 cm) |
| Package 1 Length | 4.30 in (10.922 cm) |
| Package weight(Lbs) | 16.800 oz (476.272 g) |
| Unit Type of Package 2 | CAR |
| Number of Units in Package 2 | 8 |
| Package 2 Height | 8.50 in (21.590 cm) |
| Package 2 Width | 6.00 in (15.240 cm) |
| Package 2 Length | 9.50 in (24.130 cm) |
| Package 2 Weight | 8.781 lb(US) (3.983 kg) |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


|  Materials and Substances | |
|---|---------------------------|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Compliant with Exemptions |

Use Again

|  Repack and remanufacture | |
|---|--|
| Circularity Profile | No need of specific recycling operations |
| Take-back | No |

Technical Illustration

Dimensions

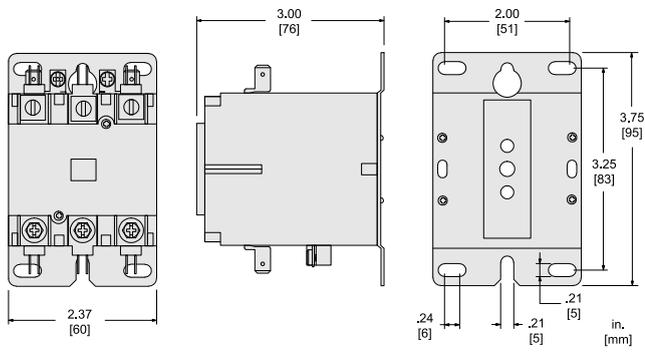

ALL DIMENSIONS ARE APPROXIMATE.
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

