

# Product data sheet

Specifications

SQUARE D



Contactor, Definite Purpose, 30A, 3 pole, 20HP at 575VAC, 3 phase, 277VAC 60Hz coil, open

8910DPA33V04

Product availability: Stock - Normally stocked in distribution facility

## Main

Product or Component Type	Definite Purpose Contactor
Line Rated Current	30 A
Number of Poles	3P
Pole contact composition	3 NO
Range of Product	DPA

## Complementary

Maximum Horse Power Rating	2 hp 115 V AC, 1 phase 5 hp 230 V AC, 1 phase 10 hp 230 V AC, 3 phase 15 hp 460 V AC, 3 phase 20 hp 575 V AC, 3 phase
Locked rotor rated current	150 A 460 V AC 120 A 575 V AC 180 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	277 V AC 60 Hz
Phase	3 phase
Electrical Connection	Quick connect terminals Binder head

## Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

## Ordering and shipping details

Category	US1CP1B21343
Discount Schedule	CP1B
GTIN	785901024422
Returnability	Yes
Country of origin	CN

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.50 in (6.35 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

Package 1 Width	3.20 in (8.128 cm)
Package 1 Length	4.20 in (10.668 cm)
Package weight(Lbs)	15.68 oz (444.52 g)

---

## Contractual warranty

---

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
SCIP Number	9635bca0-88f5-4211-aaa3-d012e1850a41


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

## Technical Illustration

## Dimensions

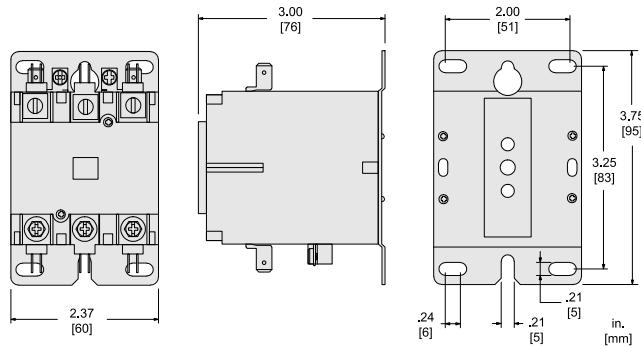

ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

