

9001KA43

30mm push button, Type K, hermetically sealed logic reed contact block, 1NC, 0.025A inductive at 120VAC, pressure wire



Main

| | |
|-------------------------------|---------------------------------|
| Range of Product | Harmony 9001K Harmony 9001SK |
| Product or Component Type | Contact block |
| Device short name | 9001K |
| Contacts type and composition | 1 NC |

Complementary

| | |
|--|--|
| Net Weight | 0.099 lb(US) (0.045 kg) |
| Contact operation | Logic reed Hermetically sealed |
| Contacts usage | Hermetically sealed contacts |
| Positive opening | Without |
| Connections - terminals | Screw clamp terminals, 1 x 0.22...2 x 2.5 mm ² IEC 60947-1 |
| Tightening torque | 7.08 lbf.in (0.8 N.m) IEC 60947-1 |
| Shape of screw head | Cross slotted |
| Short-circuit protection | 10 A cartridge fuse IEC 60947-5-1 |
| [I _{th}] conventional free air thermal current | 10 A |
| [U _i] rated insulation voltage | 250 V 3)IEC 60947-1 |
| [U _{imp}] rated impulse withstand voltage | 2.5 kV IEC 60947-1 |
| [I _e] rated operational current | 3 A 240 V, AC-15, A600-Q600 NEMA 0.55 A 125 V, DC-13, A600-Q600 NEMA |
| [I _{cm}] rated short-circuit making capacity | 12 KA 600 V AC-15, 7200 VA 15 KA 480 V AC-15, 7200 VA 30 KA 240 V AC-15, 7200 VA 60 KA 120 V AC-15, 7200 VA 0.55 KA 125 V DC-13 0.1 KA 600 V DC-13 0.27 kA 250 V DC-13 |
| Rated breaking capacity | 3 KA 240 V AC-15, 720 VA 6 KA 120 V AC-15, 720 VA 1.2 KA 600 V AC-15, 720 VA 1.5 KA 480 V AC-15, 720 VA 0.1 KA 600 V DC-13 0.27 KA 250 V DC-13 0.55 kA 125 V DC-13 |
| [U _s] rated supply voltage | 120 V |
| Connections - Terminals | Screw-clamp terminals |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

| | |
|---------------------------------------|--|
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Electrical shock protection class | Class II IEC 61140 |
| Standards | JIS C 852 EN/IEC 60947-1 EN/IEC 60947-5-4 UL 508 CSA C22.2 No 14 EN/IEC 60947-5-1 JIS C 4520 |
| Product Certifications | UL 508[RETURN]NEMA |
| Vibration resistance | 7 gn 2...500 Hz)IEC 60068-2-6 |
| Shock resistance | 50 gn IEC 60068-2-27 |

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US10CS121434 |
| Discount Schedule | OCS1 |
| GTIN | 785901498568 |
| Returnability | Yes |
| Country of origin | US |

Packing Units

| | |
|------------------------------|---------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.200 in (3.048 cm) |
| Package 1 Width | 1.900 in (4.826 cm) |
| Package 1 Length | 1.700 in (4.318 cm) |
| Package 1 Weight | 1.440 oz (40.823 g) |


Offer Sustainability

| | |
|----------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

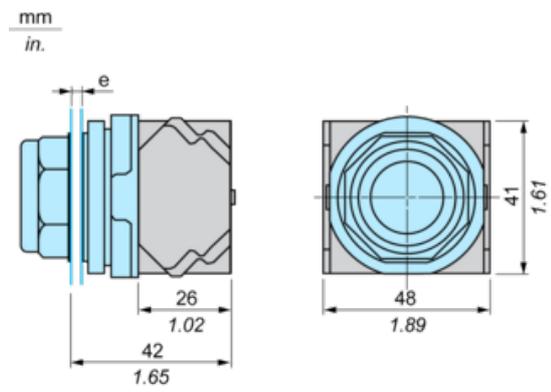

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.