

# Product data sheet

Specifications



Contact block with protected terminals, Harmony 9001K, Harmony 9001SK, 240V, screw clamp terminal, power reed, hermetically sealed, 1NC

9001KA53

**Product availability: Non-Stock - Not normally stocked in distribution facility**

## Main

Range of Product	Harmony 9001K Harmony 9001SK
Product or Component Type	Contact block
Device short name	9001K
Contacts type and composition	1 NC

## Complementary

Net Weight	0.099 lb(US) (0.045 kg)
Contact operation	Power reed Hermetically sealed
Contacts usage	Hermetically sealed contacts
Positive opening	Without
Connections - terminals	Screw clamp terminals, 1 x 0.22...2 x 2.5 mm <sup>2</sup> IEC 60947-1
Tightening torque	7.08 lbf.in (0.8 N.m) IEC 60947-1
Shape of screw head	Cross slotted
Short-circuit protection	10 A cartridge fuse IEC 60947-5-1
[I <sub>th</sub> ] conventional free air thermal current	10 A
[U <sub>i</sub> ] rated insulation voltage	250 V 3)IEC 60947-1
[U <sub>imp</sub> ] rated impulse withstand voltage	2.5 kV IEC 60947-1
[I <sub>e</sub> ] rated operational current	3 A 240 V, AC-15, A600-Q600 NEMA 0.55 A 125 V, DC-13, A600-Q600 NEMA
[I <sub>cm</sub> ] rated short-circuit making capacity	12 kA 600 V AC-15, 7200 VA 15 kA 480 V AC-15, 7200 VA 30 kA 240 V AC-15, 7200 VA 60 kA 120 V AC-15, 7200 VA 0.55 kA 125 V DC-13 0.1 kA 600 V DC-13 0.27 kA 250 V DC-13
Rated breaking capacity	3 kA 240 V AC-15, 720 VA 6 kA 120 V AC-15, 720 VA 1.2 kA 600 V AC-15, 720 VA 1.5 kA 480 V AC-15, 720 VA 0.1 kA 600 V DC-13 0.27 kA 250 V DC-13 0.55 kA 125 V DC-13
[U <sub>s</sub> ] rated supply voltage	240 V

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

Connections - Terminals	Screw-clamp terminals
-------------------------	-----------------------

## Environment

---

Protective treatment	TC
----------------------	----

---

Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
-------------------------------------	----------------------------

---

Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
---------------------------------------	----------------------------

---

Electrical shock protection class	Class II conforming to IEC 61140
-----------------------------------	----------------------------------

---

Standards	CSA C22.2 No 14 IEC 60947-1 IEC 60947-5-1 JIS C 4520 JIS C 852 IEC 60947-5-4 UL 508 UL 60947-5-1
-----------	---

---

Product Certifications	NEMA UL 508
------------------------	----------------

---

Vibration resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
----------------------	--

---

Shock resistance	50 gn IEC 60068-2-27
------------------	----------------------

## Ordering and shipping details

---

Category	US10CS121434
----------	--------------

---

Discount Schedule	0CS1
-------------------	------

---

GTIN	785901827511
------	--------------

---

Returnability	Yes
---------------	-----

---

Country of origin	MX
-------------------	----

## Packing Units

---

Unit Type of Package 1	PCE
------------------------	-----

---

Nbr. of units in pkg.	1
-----------------------	---

---

Package 1 Height	1.10 in (2.8 cm)
------------------	------------------

---

Package 1 Width	1.69 in (4.3 cm)
-----------------	------------------

---

Package 1 Length	1.89 in (4.8 cm)
------------------	------------------

---

Package weight(Lbs)	1.4 oz (41 g)
---------------------	---------------

---

Unit Type of Package 2	S01
------------------------	-----

---

Number of Units in Package 2	36
------------------------------	----

---

Package 2 Height	5.91 in (15 cm)
------------------	-----------------

---

Package 2 Width	5.91 in (15 cm)
-----------------	-----------------

---

Package 2 Length	15.75 in (40 cm)
------------------	------------------

---

Package 2 Weight	4.8 oz (136 g)
------------------	----------------

## Contractual warranty

---

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard

No

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d

REACH Regulation

[REACH Declaration](#)

California proposition 65

**WARNING:** This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Use Again

### Repack and remanufacture


Take-back

No

Dimensions Drawings

Dimensions

---

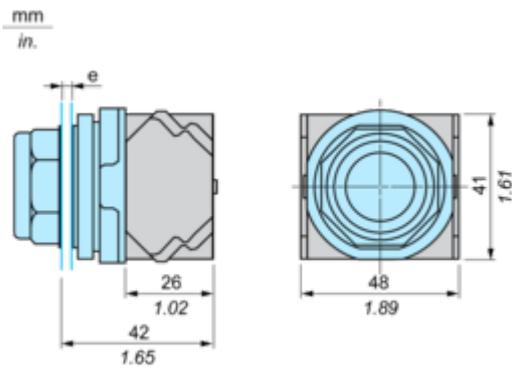

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Offer Marketing Illustration

Product benefits / Features

---

**Features**  
Harmony 9001K



- 

Improved security thanks to finger-safe contact blocks and light modules
- 

Single screw Contact Block Fastening
- 

Robustness to withstand the harshest environments
- 

Automatic self-grounding operators without additional wiring
- 

Large metal set of accessories to customize your product

Offer Marketing Illustration

Product benefits / Features

---

### Technical Benefits

#### Harmony 9001K

