Product data sheet

Specifications

Empty enclosure control station, Harmony 9001K, Harmony 9001SK, stainless steel, 2 cut outs, 30mm

9001KYSS2

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001K Harmony 9001SK
Product or Component Type	Empty enclosure
Device short name	9001K
Number of cut-out	2 cut-outs
Cable entry	1 entry tapped for 3/4" knockout

Complementary

Product destination	For Ø 30 mm control and signalling units
Material	Stainless steel
Net Weight	3.02 lb(US) (1.37 kg)

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40…158 °F (-40…70 °C)
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Overvoltage category	II conforming to IEC 61140
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 3 NEMA 4 NEMA 4X

Ordering and shipping details

Category	US10CS121426
Discount Schedule	0CS1
GTIN	785901017493
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.315 in (13.500 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Width	4.724 in (12.000 cm)
Package 1 Length	8.071 in (20.500 cm)
Package weight(Lbs)	3.005 lb(US) (1.363 kg)
Unit Type of Package 2	S03
Number of Units in Package 2	6
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	19.601 lb(US) (8.891 kg)

Contractual warranty

Warranty	18 months

🌀 Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained ›

How we assess product sustainability ›

🍃 Environmental footprint

Environmental Disclosure	**Product Environmental Profile**

Use Better

🥬 Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Pro-active compliance (Product out of EU RoHS legal scope)**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

↻ Repack and remanufacture

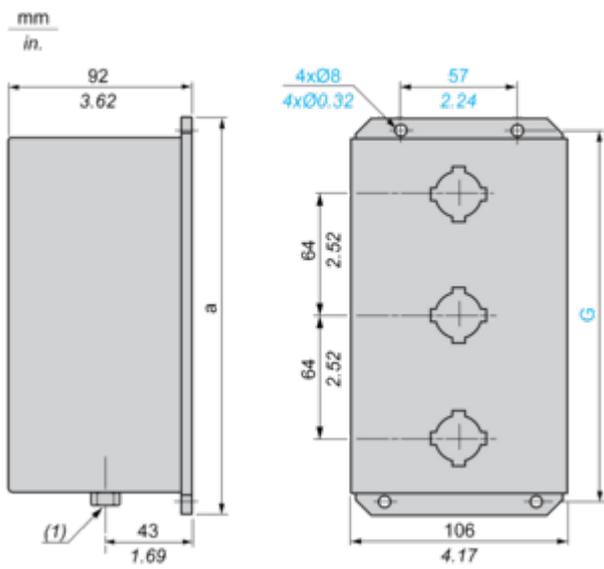|	
Circularity Profile	**End of Life Information**
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings

Dimensions

Below drawing shows a 3-hole enclosure. Refer to the product characteristics to get the number of holes

(1) Knockout conduit thread: 3/4".

a		G	
mm	in.	mm	in.
197	7.75	181	7.12

Offer Marketing Illustration

Product benefits / Features

Features
Harmony 9001K

Improved security thanks to finger-safe contact blocks and light modules

Single screw Contact Block Fastening

Robustness to withstand the harshest environments

Large metal set of accessories to customize your product

Automatic self-grounding operators without additional wiring

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Harmony 9001K

Compliant with IEC, UL, CSA, EN and NOM standards, CE marking

-25°C to +70°C operating temperature range

IP66, NEMA 4 rated (Heavy duty, oil tight, waterproof and dust tight without requiring boots)

Contacts and heads designed against vibration (2 to 500 Hz: 7gn), ensuring secure mounting and wiring

American Bureau of Shipping Approved for Marine Applications & meet all US automotive standards

Class I Div. 1 (gas) and Class II Div. 1 (dust) with reed contact blocks

Image of product / Alternate images

Alternative