Product data sheet

Specifications

Empty enclosure control station, Harmony 9001K, Harmony 9001SK, plastic, 2 cut outs, 30mm, for 3 4 cable entry

9001SKY2

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001SK Harmony 9001K
Product or Component Type	Empty enclosure
Device short name	9001SK
Number of cut-out	2 cut-outs
Cable entry	1 entry tapped for 3/4" knockout

Complementary

Product destination	For Ø 30 mm control and signalling units
Material	Plastic
Net Weight	1.52 lb(US) (0.69 kg)

Environment

Protective treatment	TH
Ambient Air Temperature for Storage	-40…158 °F (-40…70 °C)
Ambient Air Temperature for Operation	-13…158 °F (-25…70 °C)
Overvoltage category	II conforming to IEC 61140
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 3 NEMA 4 NEMA 4X

Ordering and shipping details

Category	US10CS121429
Discount Schedule	0CS1
GTIN	785901154082
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Height	5.200 in (13.208 cm)
Package 1 Width	4.800 in (12.192 cm)
Package 1 Length	8.000 in (20.320 cm)
Package weight(Lbs)	27.200 oz (771.106 g)
Unit Type of Package 2	PAL
Number of Units in Package 2	210
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	360.000 lb(US) (163.293 kg)

Contractual warranty

Warranty	18 months

Life Is On | Schneider Electric

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained 〉

How we assess product sustainability 〉

Use Better

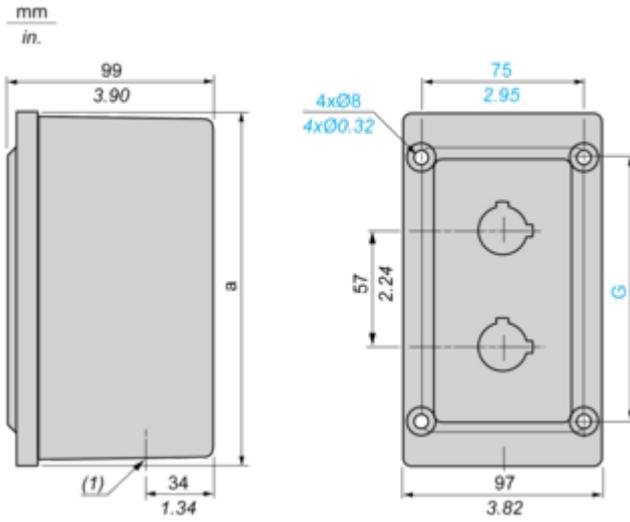| Materials and Substances	
Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Pro-active compliance (Product out of EU RoHS legal scope)**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

Repack and remanufacture	
Take-back	**No**
WEEE Label	**The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.**

Dimensions Drawings

Dimensions

Below drawing shows a 2-hole enclosure. Refer to the product characteristics to get the number of holes.

(1) Knockout conduit thread: 3/4".

a		G	
mm	in.	mm	in.
169	6.65	124	4.88

Offer Marketing Illustration

Product benefits / Features

Features
Harmony 9001SK

Improved security thanks to finger-safe contact blocks and light modules

Single screw Contact Block Fastening

Robustness to withstand the harshest environments

Large metal set of accessories to customize your product

Automatic self-grounding operators without additional wiring

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Harmony 9001SK

Compliant with IEC, UL, CSA, EN and NOM standards, CE marking

-25°C to +70°C operating temperature range

IP66, NEMA 4 rated & 13 (reinforced sealing for corrosion resistance to oils, dust and water)

Contacts and heads designed against vibration (2 to 500 Hz: 7gn), ensuring secure mounting and wiring

American Bureau of Shipping Approved for Marine Applications & meet all US automotive standards

Class I Div. 1 (gas) and Class II Div. 1 (dust) with reed contact blocks

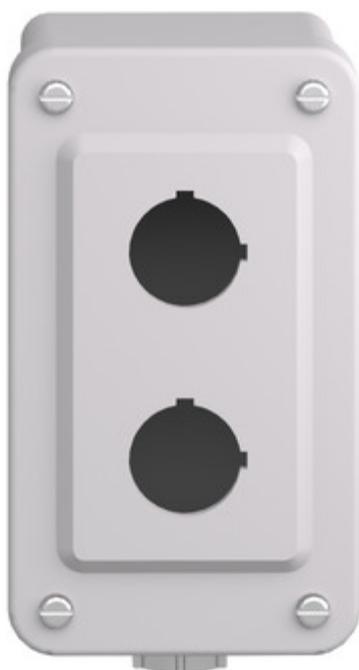Image of product / Alternate images

Alternative

Life Is On | Schneider Electric

Image of product in real life situation