



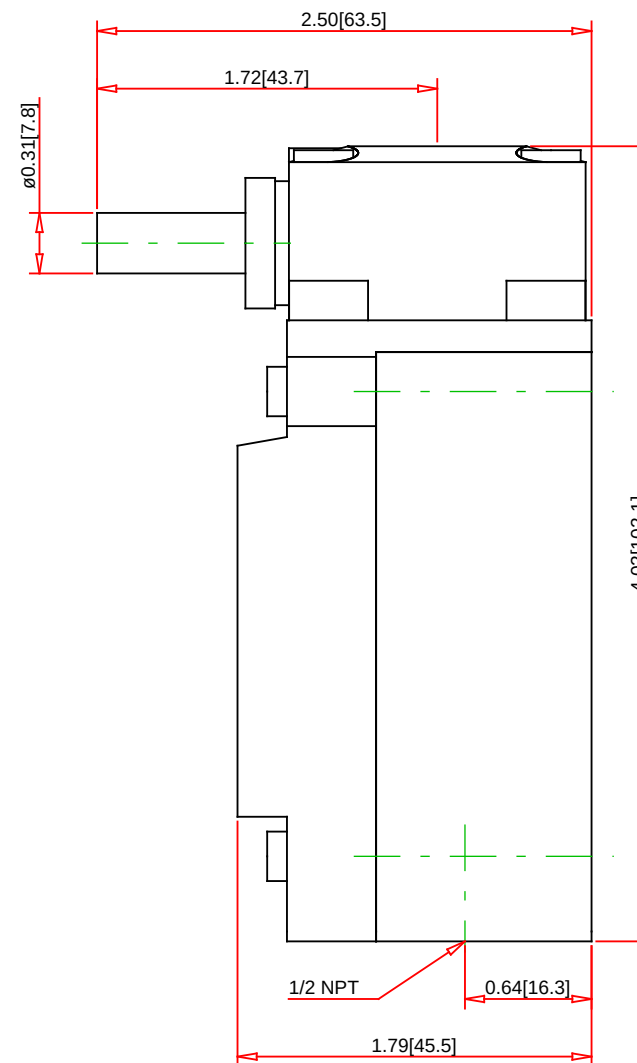

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9007C54B2Y247

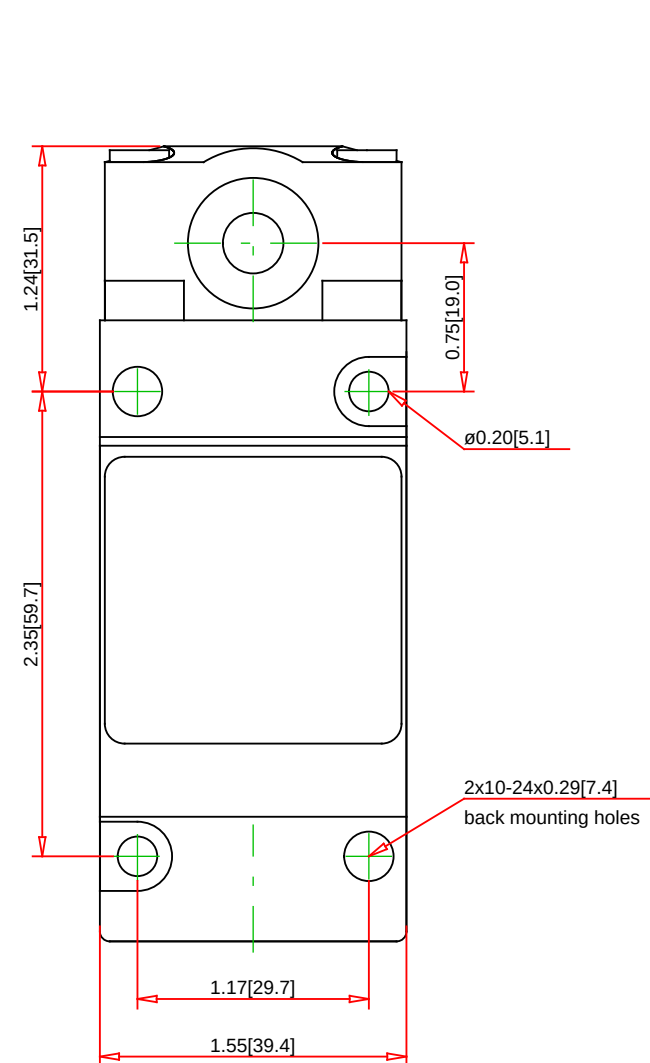

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 1/2/4/6/6P/12/13
Approvals: UL# E42259 CCN NKCR - CSA # LR25490 Class 3211-03 - CE Marked
Weight: 1.21 lb
Conforming to Standards: NEMA and UL type 6P, NOM, ANCE
RoHS: No
Operating Temperature Range: -20 to 185 °F
Shock Resistance: 60 gn (9ms)
Vibration Resistance: 25 gn (10-150 Hz, 11 ms)
Max. Actuation Speed : 15.2 mpm / 27.4mpm (50 fpm / 90 fpm) + 45 degree cam, levers only
Repeat Accuracy: 0.05mm (+/- 0.002 in.)
Operating Torque/Force: 4 in-Pounds
Cable Length:

Specification:

Description: std. rotary spring rtn std pretravel CW+CCW small dia. shaft 0.306"
Body Style/Type Description: NEMA Square D 9007 Limit Switches 9007C Heavy Duty SemiModular 39mm Metal Body
Head Type: 9007B2 rotary spring return, std. pretravel, CW+CCW small dia. shaft 0.306"
Lever Arms: Lever Arm (ordered separately)
Body with Contact Type: 1 N.O. / 1 N.C. SPDT Snap Action
Conduit Thread: 0.5 NPT
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 600V
Actuation: CW and CCW
Actuator Action: Spring Return - standard Pretravel
Lever Arm Length:
Roller Dimension:
Roller Material:
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: Conduit Entrance (0.5 Inch NPT)
Head Material: Zinc Alloy
Positive Opening: No