




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9007CR53A2

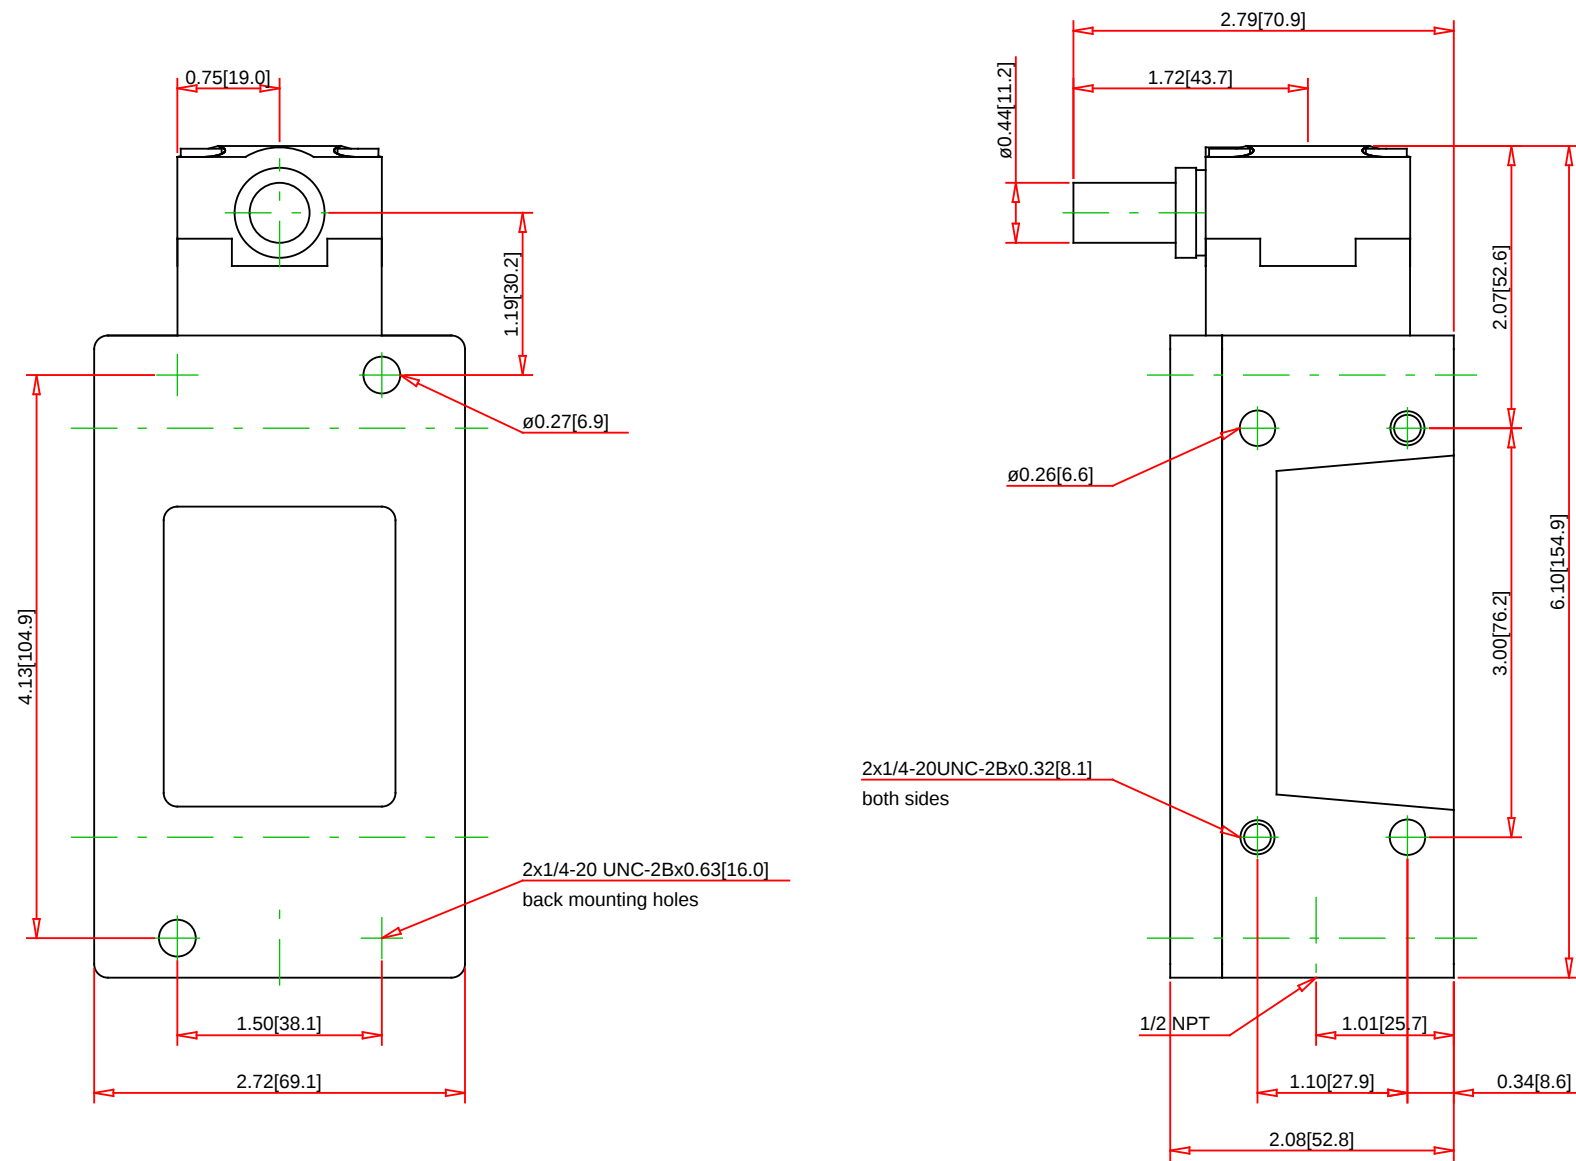

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:		Specification:	
Terminal Type:	Screw Clamp	Description:	NEMA 7/9 rotary low diff. spring rtn CW+CCW
Enclosure Rating:	NEMA 1/2/4/6/6P/7/9/12/13	Body Style/Type Description:	NEMA Square D 9007 Limit Switches 9007C Heavy Duty SemiModular 39mm Metal Body
Approvals:	UL # E10054 CCN NOIV - CSA # LR26817 Class 3218-023	Head Type:	9007A2 rotary low diff. spring return CW+CCW
Weight:	2.22 lb	Lever Arms:	Lever Arm (ordered separately)
Conforming to Standards:	NEMA and UL type 6P, NOM, ANCE	Body with Contact Type:	1 N.O. / 1 N.C. SPDT Snap Action
RoHS:	No	Conduit Thread:	0.5 NPT
Operating Temperature Range:	-20 to 185 °F	Ampere Rating Continuous:	10A
Shock Resistance:	60 gn (9ms)	Maximum Voltage Rating:	600V
Vibration Resistance:	25 gn (10-150 Hz, 11 ms)	Actuation:	CW and CCW
Max. Actuation Speed :	15.2 mpm / 27.4mpm (50 fpm / 90 fpm) + 45 degree cam, levers only	Actuator Action:	Spring Return - Low Differential
Repeat Accuracy:	0.03 mm (+/- 0.001 in.)	Lever Arm Length:	
Operating Torque/Force:	4 in-Pounds	Roller Dimension:	
Cable Length:		Roller Material:	
		Contact Configuration:	1 N.O./1 N.C.
		Contact Operation:	Snap Action
		Connection Type:	Conduit Entrance (0.5 Inch NPT)
		Head Material:	Zinc Alloy
		Positive Opening:	No