




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
9012GGW4Q1

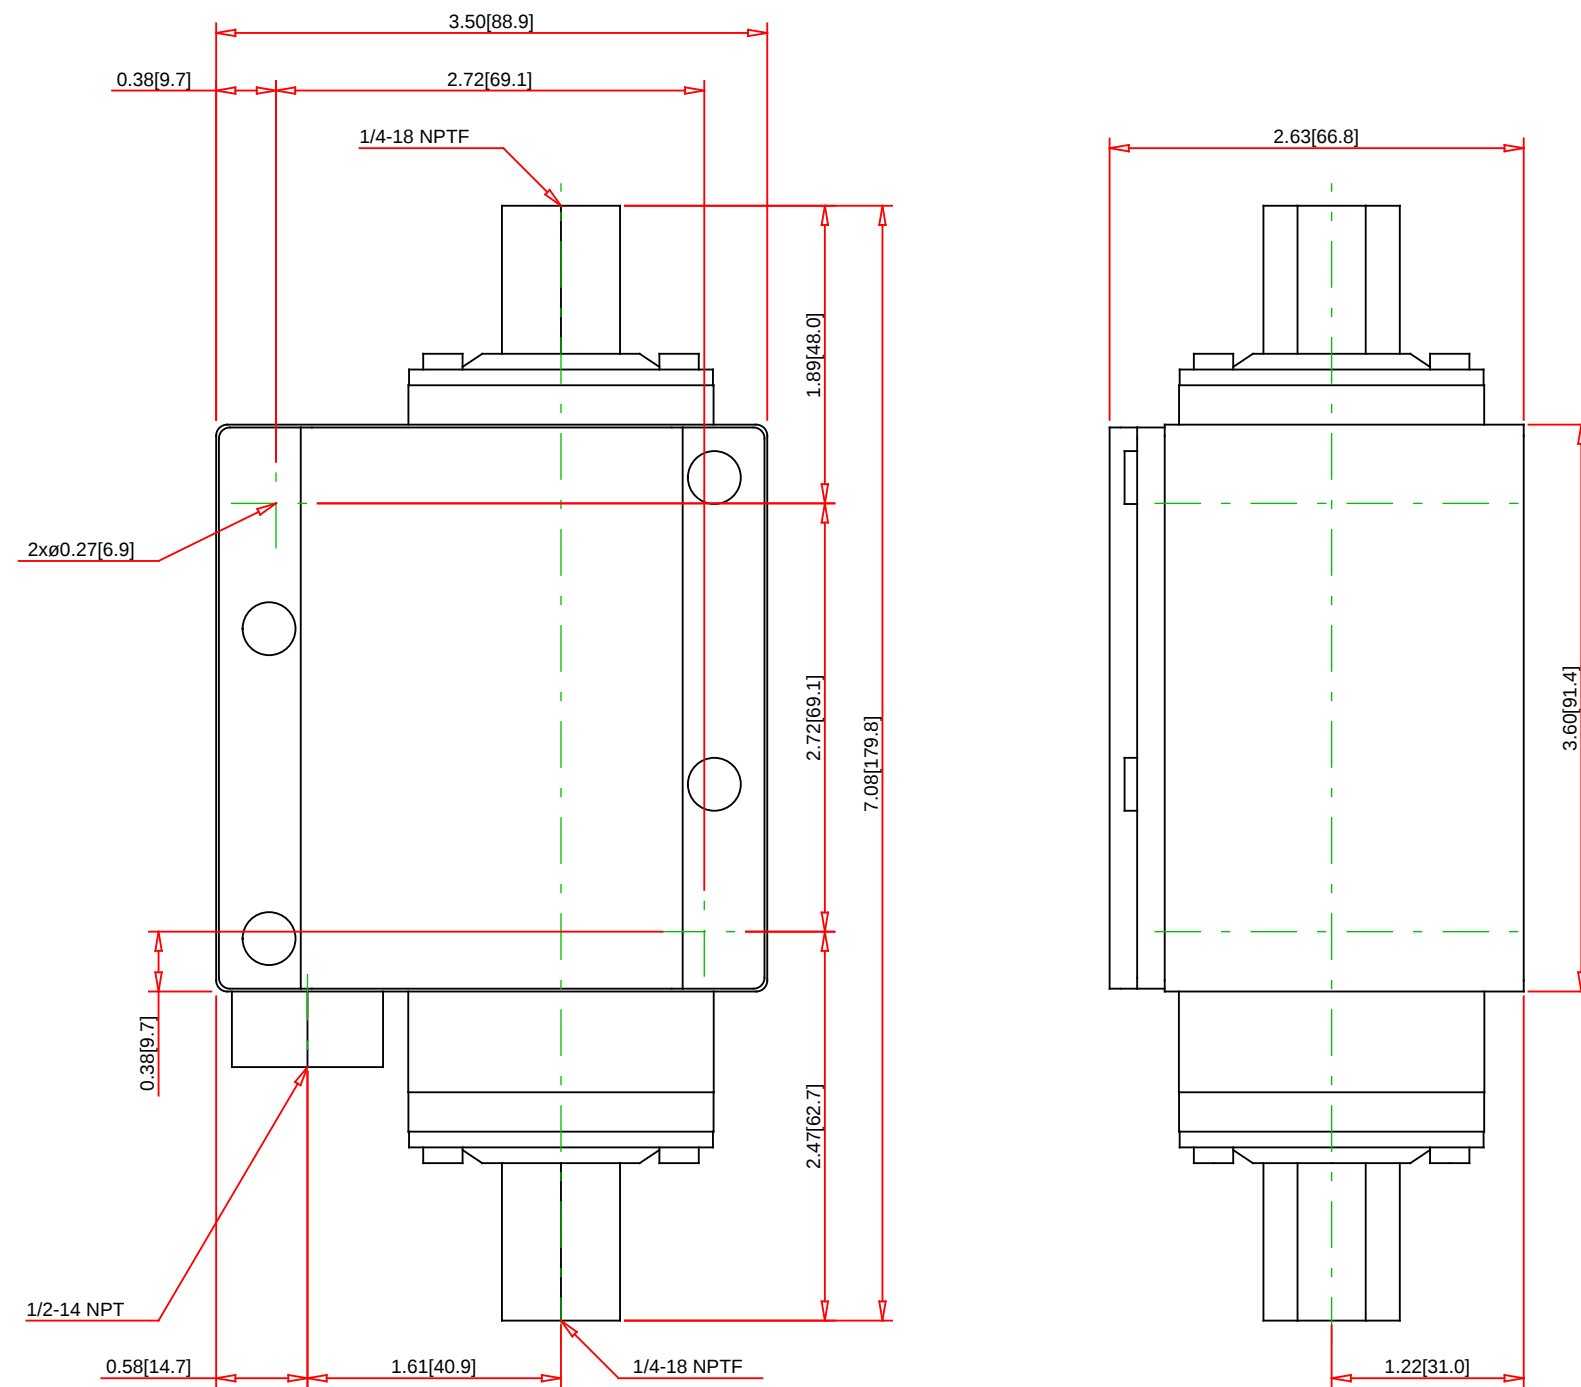

Telemechanique
Sensors

Telemechanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Fluid Characteristics: Select Corrosive Liquids and gases
Enclosure Rating: NEMA 4/4X/13
Certifications: UL / CSA / CE
RoHS: No
Precision: +/- 1% of adjustable range 1 million operations
Ambient air temp. for operation: -10 to 185°F (-23 to 85°C)
Vibration Resistance: 50 g
Repeat Accuracy: 0.4% of the adjustable range
Operating rate: <= 120 operating cycles/min
Weight: 3 lb

Specification:

Description: NEMA Square D Electromechanical Pressure Switches, Control Circuit Rated, 9012G
Pressure Range: 0 to 175 psi
Max. Allowable Pressure: 240 psi
Differential Type: 0
Output: SPDT Contacts
Electrical Connection: 0.5 in NPT Conduit Entrance
Differential: Decreasing: 0.5 to 36 psi - Increasing: 5 to 15 psi
Fluid Connection: 0.25 in 18 NPTF
Actuator Type: diaphragm
Rated Supply voltage: 240VAC - 3 A, 120VAC - 6 A, 250 VDC - 0.27 A
Continuous Current Rating: 10A