
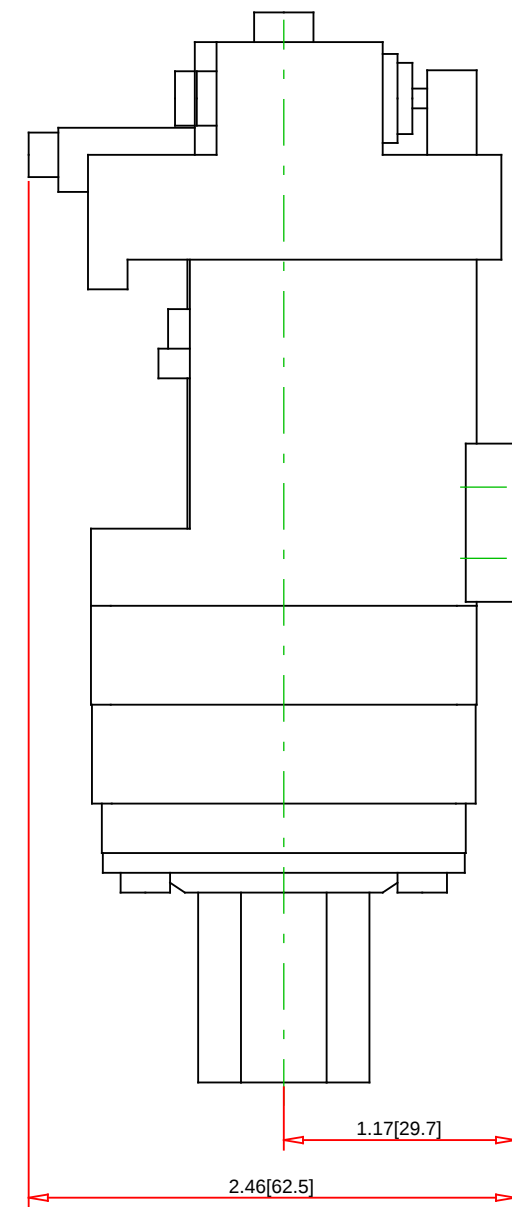


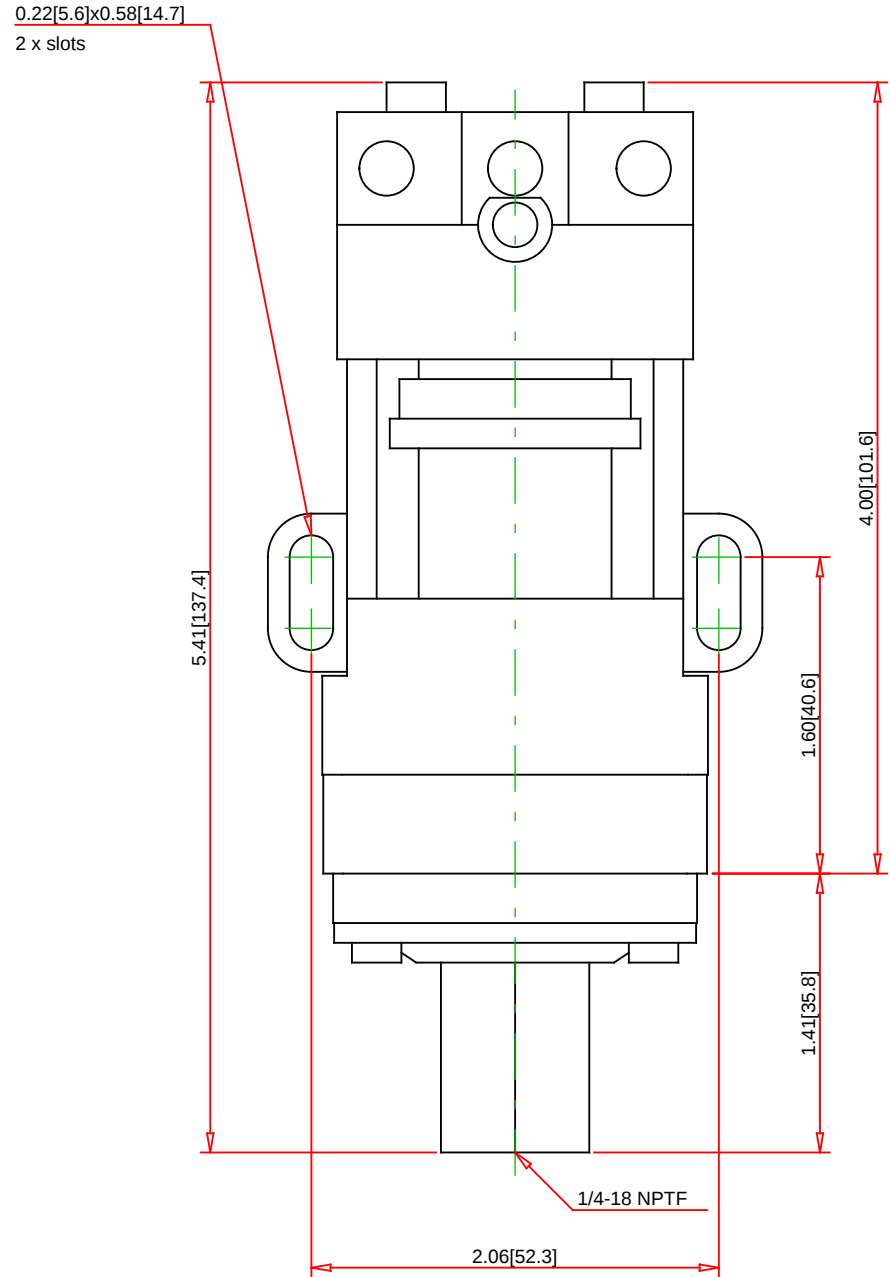

Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]		Part No.: 9012GNO4		 Telemecanique Sensors Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com	
Technical Information: Fluid Characteristics: Hydraulic oil, noncorrosive liquids, air, noncorrosive gas Enclosure Rating: Open Style - No Enclosure Rating Certifications: UL / CSA / CE RoHS: No Precision: +/- 1% of adjustable range 1 million operations Ambient air temp. for operation: -10 to 185°F (-23 to 85°C) Vibration Resistance: 50 g Repeat Accuracy: 0.4% of the adjustable range Operating rate: <= 120 operating cycles/min Weight: 1.68 lb				Specification: Description: NEMA Square D Electromechanical Pressure Switches, Control Circuit Rated, 9012G Pressure Range: 1.5 to 75 psi Max. Allowable Pressure: 240 psi Differential Type: Adjustable Output: SPDT Contacts Electrical Connection: 0.5 in NPT Conduit Entrance Differential: 2.2 to 11 psi Fluid Connection: 0.25 in 18 NPTF Actuator Type: diaphragm Rated Supply voltage: 240VAC - 3 A, 120VAC - 6 A, 250 VDC - 0.27 A Continuous Current Rating: 10A	