
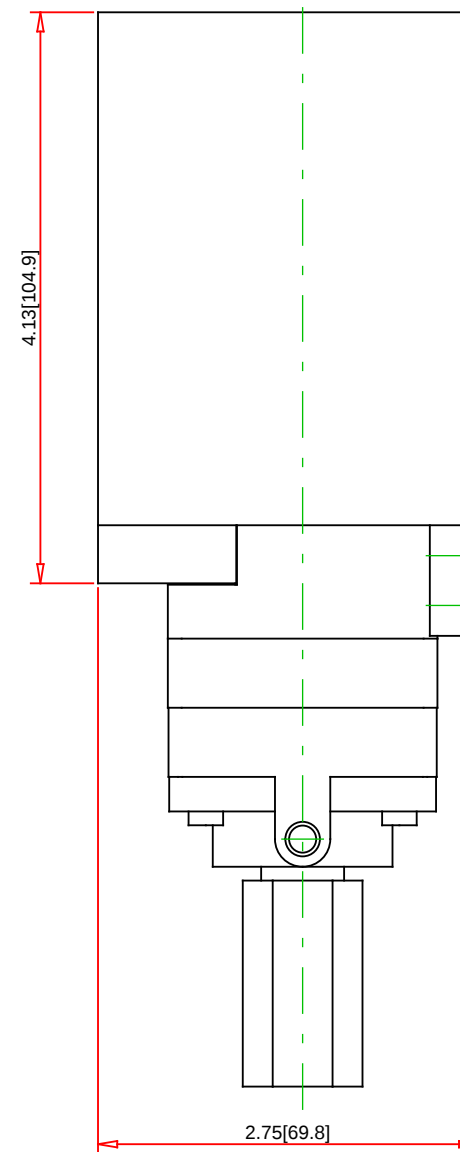


0.22[5.6]x0.58[14.7]  
2 x slots

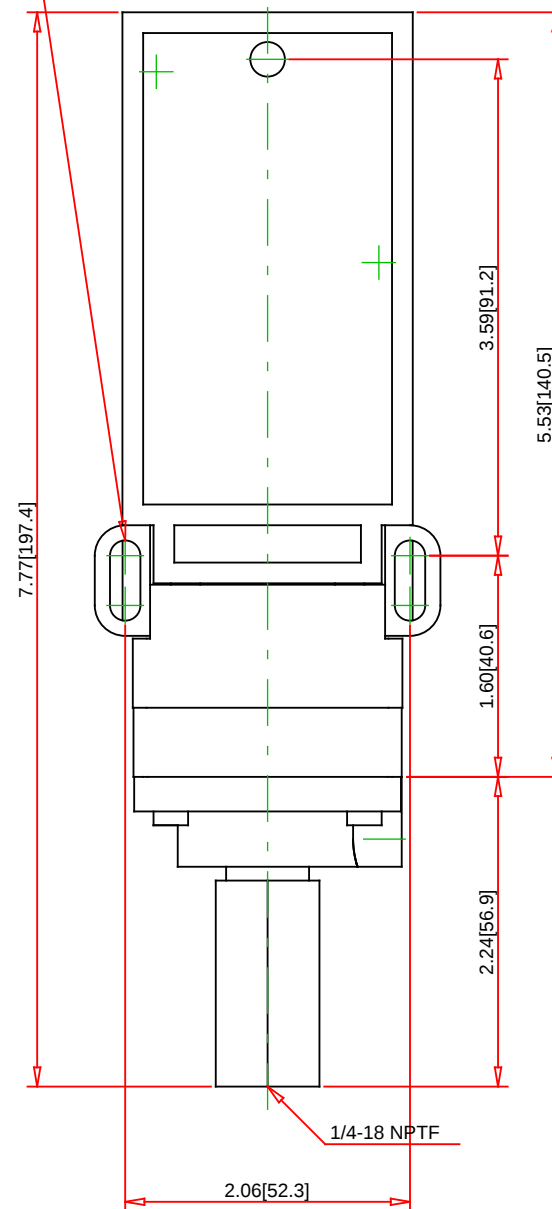

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9012GTG1



Telemecanique  
Sensors

Telemecanique Sensors  
1875 Founders Drive  
Dayton, OH 45420-4017  
Customer Care Center : 1-800-435-2121  
Web : [www.tesensors.com](http://www.tesensors.com)

Technical Information:

Fluid Characteristics: Select Corrosive Liquids and gases  
Enclosure Rating: NEMA 1  
Certifications: UL / CSA / CE  
RoHS: No  
Precision: +/- 1% of adjustable range 1 million operations  
Ambient air temp. for operation: -10 to 185°F (-23 to 85°C)  
Vibration Resistance: 50 g  
Repeat Accuracy: 0.4% of the adjustable range  
Operating rate: <= 120 operating cycles/min  
Weight: 2 lb

Description: NEMA Square D Electromechanical Pressure Switches, Control Circuit Rated, 9012G  
Pressure Range: 20 to 1000 psi  
Max. Allowable Pressure: 10000 psi  
Differential Type: Fixed  
Output: SPDT Contacts  
Electrical Connection: 0.5 in NPT Conduit Entrance  
Differential: 49 psi (+/- 10)  
Fluid Connection: 0.25 in 18 NPTF  
Actuator Type: piston  
Rated Supply voltage: 240VAC - 3 A, 120VAC - 6 A, 250 VDC - 0.27 A  
Continuous Current Rating: 10A

Specification: