

# Product data sheet

## Characteristics

# 9050JCK60V20

Timing Relay, Type JCK, plug In, on delay, programmable, 0.5 second to 999 hours, 10A, 240 VAC, 120 VAC/110 VDC



### Main

Product range	9050JCK
Product type	Timer
Timing mode	On-delay
Timing range	0.1...99.9 s 1...999 s 0.1...99.9 min 0.05...9.99 s 0.1...99.9 h 1...999 h
Supply voltage	120 V AC

### Complementary

Power consumption	3 VA
Current rating	10 A
Switch function	DPDT
Contact composition	2 NO + 2 NC
Contact material	Silver nickel
Maximum switching voltage	240 V AC
Mounting type	Socket
Number of pins	8
Shape of pins	Tubular
For use with	8501NR51 8501NR52

### Environment

Certifications	CE[RETURN]UL Recognized[RETURN]UL Listed
Ambient temperature range - operational	-27.8...65.6 °C (-18...150 °F)
Height	2.4 in (60 mm)
Width	1.7 in (44 mm)
Depth	3.6 in (91 mm)

### Ordering and shipping details

Category	US10CP221652
Discount Schedule	OCP2
GTIN	785901053866
Returnability	Yes
Country of origin	MX

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.900 in (4.826 cm)
Package 1 Width	2.600 in (6.604 cm)
Package 1 Length	4.400 in (11.176 cm)
Package 1 Weight	4.800 oz (136.078 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Height	4.50 in (11.43 cm)
Package 2 Width	10.0000000000 in (25.4 cm)
Package 2 Length	11.0000000000 in (27.94 cm)
Package 2 Weight	5.501 lb(US) (2.495 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	600
Package 3 Height	40.0000000000 in (101.6 cm)
Package 3 Width	40.0000000000 in (101.6 cm)
Package 3 Length	48.0000000000 in (121.92 cm)
Package 3 Weight	165.0007 lb(US) (74.843 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

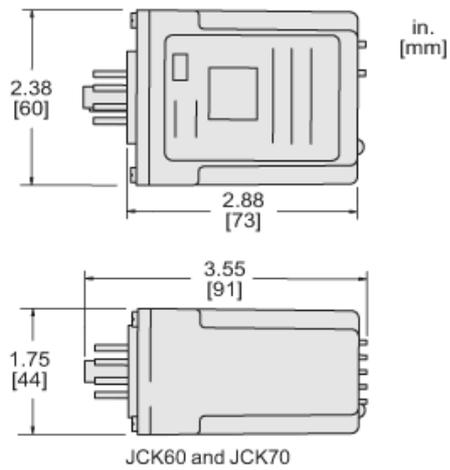

Connections and Wiring Diagrams

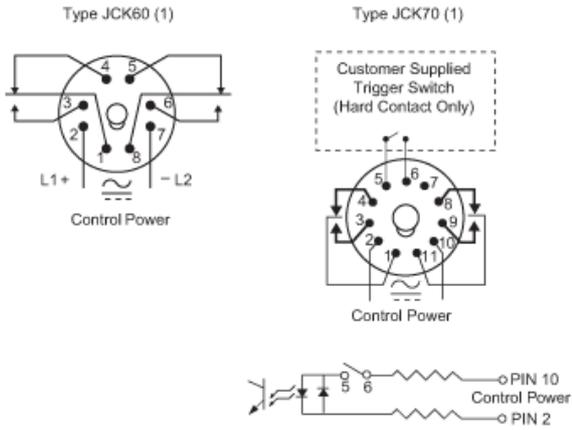

(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).