

# Product data sheet

## Characteristics

# 9050JCK70V20

Timing Relay, Type JCK, plug In, multifunction, programmable, 0.5 second to 999 hours, 10A, 240 VAC, 120 VAC/110 VDC



### Main

Product range	9050JCK
Product type	Timer
Timing mode	One shot falling edge Repeat cycle Trigger on-delay Interval Off-delay Watchdog One shot On-delay On-delay and off-delay
Timing range	1...999 h 0.05...9.99 s 1...999 s 0.1...99.9 s 0.1...99.9 h 1...999 min
Supply voltage	120 V AC

### Complementary

Power consumption	3 VA
Current rating	10 A
Switch function	DPDT
Contact composition	2 NO + 2 NC
Contact material	Silver nickel
Maximum switching voltage	240 V AC
Mounting type	Socket
Number of pins	11
Shape of pins	Tubular
For use with	8501NR61 8501NR62

### Environment

Certifications	CE[RETURN]UL Recognized[RETURN]UL Listed
Ambient temperature range - operational	-27.8...65.6 °C (-18...150 °F)
Height	2.4 in (60 mm)
Width	1.7 in (44 mm)
Depth	3.6 in (91 mm)







### Ordering and shipping details

Category	US10CP221652
Discount Schedule	OCP2
GTIN	785901053880
Returnability	Yes
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.900 in (4.826 cm)
Package 1 Width	2.50 in (6.35 cm)
Package 1 Length	4.300 in (10.922 cm)
Package 1 Weight	4.800 oz (136.078 g)

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#"> REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#"> EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#"> China RoHS Declaration</a>
RoHS exemption information	<a href="#"> Yes</a>
Environmental Disclosure	<a href="#"> Product Environmental Profile</a>
Circularity Profile	<a href="#"> End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------


---

Approximate Dimensions

---

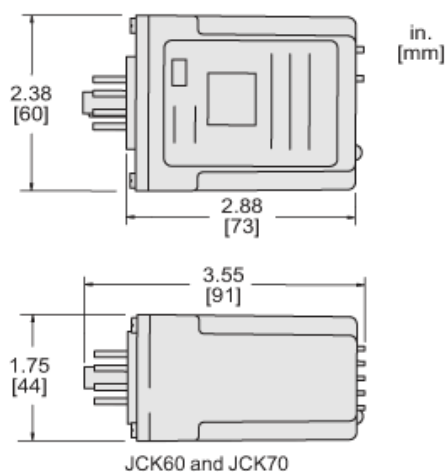

## Connections and Wiring Diagrams

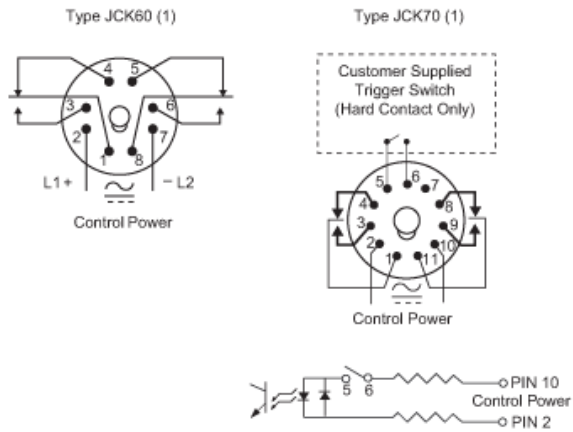

(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).