

# Product data sheet

Specifications

SQUARE D



Transformer, Type T, industrial control, 100VA, 1 phase, 120V primary, 12/24V secondary, 55C rise

9070T100D13

**Product availability:** Stock - Normally stocked in distribution facility

## Main

Product Type	Industrial Control Transformer
Type	T

## Complementary

Number of Phases	1 phase
Power Rating	100 VA UL 100 VA CSA 100 VA NOM 100 VA CE
Primary to Secondary Voltage	120 V 12/24 V
Temperature Rise	55 °C
Electrical Connection	Screw clamp terminals
Height	2.89 in (73.41 mm)
Width	3.38 in (85.85 mm)
Depth	3.34 in (84.84 mm)
Material	Copper: winding
Fingersafe Cover Compatibility	FSC1

## Environment

Certifications	CSA file LR37055 guide 184-N-90 UL listed file E61239
Enclosure Type	Not rated (open device)
Insulation Temperature	221 °F (105 °C)

## Ordering and shipping details

Category	US10CP816200
Discount Schedule	0CP8
GTIN	785901905561
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	5.50 in (13.970 cm)
<b>Package 1 Width</b>	6.20 in (15.748 cm)
<b>Package 1 Length</b>	7.20 in (18.288 cm)
<b>Package weight(Lbs)</b>	4.239 lb(US) (1.923 kg)
<b>Unit Type of Package 2</b>	PAL
<b>Number of Units in Package 2</b>	450
<b>Package 2 Height</b>	40.00 in (101.600 cm)
<b>Package 2 Width</b>	40.00 in (101.600 cm)
<b>Package 2 Length</b>	48.00 in (121.920 cm)
<b>Package 2 Weight</b>	1719.0008 lb(US) (779.725 kg)

## Contractual warranty

<b>Warranty</b>	10 Years
-----------------	----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant with Exemptions
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>
PVC free	Yes


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No



## Technical Illustration

## Dimensions

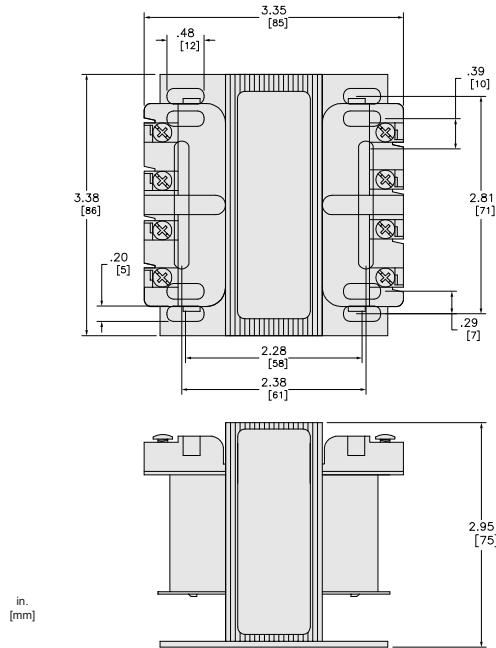

## Technical Illustration

## Wiring diagram



## Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D13	120	12/24	Connect to H1 and H2	
D36	600		Connect to H1 and H2	
D54	120 x 240		120: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 240: Connect to H1 and H4 Jumper H2 with H3	12: Connect to X1 and X4 Jumper X1 with X3 Jumper X2 with X4 24: Connect to X1 and X4 Jumper X2 with X3
D59	240 x 480		240: Connect to H1 and H4 Jumper H1 with H3 Jumper H2 with H4 480: Connect to H1 and H4 Jumper H2 with H3	

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.