

# Product data sheet

Specifications

SQUARE D



Transformer, Type T, industrial control, 150VA, 1 phase, 208V primary, 24V secondary, 55C rise

9070T150D14

Product availability: Stock - Normally stocked in distribution facility

## Main

Product Type	Industrial Control Transformer
Type	T

## Complementary

Number of Phases	1 phase
Power Rating	150 VA UL 150 VA CSA 150 VA NOM 150 VA CE
Primary to Secondary Voltage	208 V 24 V
Temperature Rise	55 °C
Electrical Connection	Screw clamp terminals
Height	3.2 in (81.3 mm)
Width	3.75 in (95.25 mm)
Depth	3.59 in (91.19 mm)
Material	Copper: winding
Fingersafe Cover Compatibility	FSC1

## Environment

Certifications	UL listed file E61239 CSA file LR37055 guide 184-N-90
Enclosure Type	Not rated (open device)
Insulation Temperature	221 °F (105 °C)

## Ordering and shipping details

Category	US10CP816200
Discount Schedule	0CP8
GTIN	785901338581
Returnability	Yes

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.70 in (9.398 cm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

---

Package 1 Width	4.20 in (10.668 cm)
Package 1 Length	4.30 in (10.922 cm)
Package weight(Lbs)	5.390 lb(US) (2.445 kg)

---

## Contractual warranty

---

Warranty	10 Years
----------	----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65   
 WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

PVC free Yes

## Use Again


### Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No


## Technical Illustration

## Dimensions

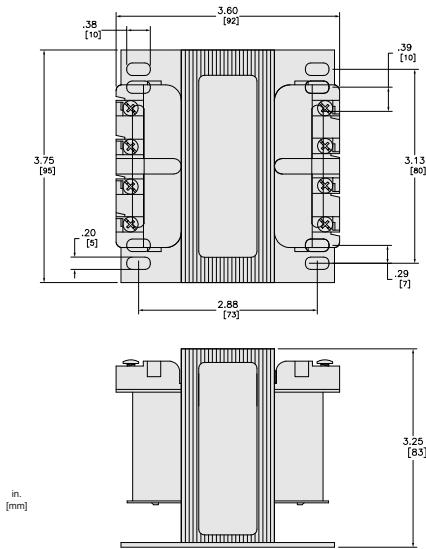

## Technical Illustration

## Wiring diagram

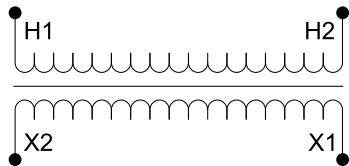

## Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D7	120	24		
D14	208	24		
D16	600	24		
D25	277	24		
D88	380	24		
D112	230	24		

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.