

Product data sheet

Specifications

SQUARE D



Transformer, Type T, industrial control, 300VA, 1 phase, 600V primary, 120V secondary, 80C rise

9070T300D5

Product availability: Stock - Normally stocked in distribution facility

Main

Product Type Industrial Control Transformer

Type T

Complementary

Number of Phases 1 phase

Power Rating 300 VA UL
300 VA CSA
300 VA NOM
200 VA CE

Primary to Secondary Voltage 600 V 120 V
575 V 115 V
550 V 110 V

Temperature Rise 80 °C

Electrical Connection Screw clamp terminals

Height 3.84 in (97.54 mm)

Width 4.5 in (114.3 mm)

Depth 4.74 in (120.40 mm)

Material Copper: winding

Fingersafe Cover Compatibility FSC2

Environment

Certifications UL listed file E61239
CSA file LR37055 guide 184-N-90

Enclosure Type Not rated (open device)

Insulation Temperature 266 °F (130 °C)

Ordering and shipping details

Category US10CP816201

Discount Schedule 0CP8

GTIN 785901905660

Returnability Yes

Country of origin MX

Packing Units

Unit Type of Package 1 PCE

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Nbr. of units in pkg.	1
Package 1 Height	6.40 in (16.256 cm)
Package 1 Width	6.80 in (17.272 cm)
Package 1 Length	7.60 in (19.304 cm)
Package weight(Lbs)	8.501 lb(US) (3.856 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	150
Package 2 Height	40.00 in (101.6 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	1373.585 lb(US) (623.047 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Environmental Disclosure

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic No

[EU RoHS Directive](#) Compliant with Exemptions

REACH Regulation [REACH Declaration](#)

California proposition 65
 WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

PVC free Yes

Use Again



Repack and remanufacture

Circularity Profile No need of specific recycling operations

Take-back No


Technical Illustration

Dimensions

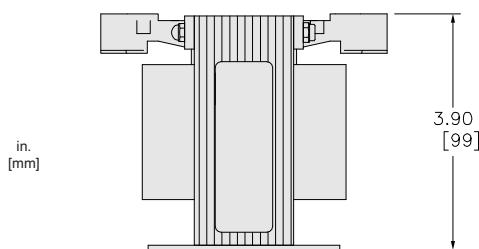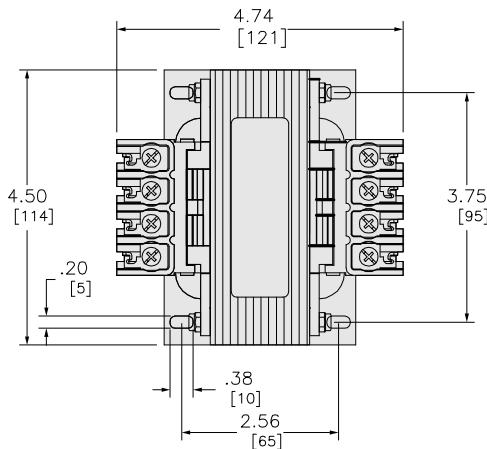

Technical Illustration

Wiring diagram

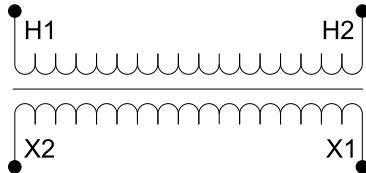

Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D3	208	120		
D4	277	120		
D5	550 575 600	110 115 120		
D6	380	110		
D17	415	110		
D24	110 115 120	110 115 120	Connect to H1 and H2	Connect to X1 and X2
D93	200	115		
D103	400	120		

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.