

Product data sheet

Specifications

SQUARE D



Transformer, Type T, industrial control, 75VA, 1 phase, 208/230/460V primary, 115V secondary, 55C rise

9070T75D20

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

| | |
|--------------|--------------------------------|
| Product Type | Industrial Control Transformer |
| Type | T |

Complementary

| | |
|--------------------------------|--|
| Number of Phases | 1 phase |
| Power Rating | 75 VA UL 75 VA CSA 75 VA NOM 75 VA CE |
| Primary to Secondary Voltage | 208/230/460 V 115 V |
| Temperature Rise | 55 °C |
| Electrical Connection | Screw clamp terminals |
| Height | 2.89 in (73.41 mm) |
| Width | 3.38 in (85.85 mm) |
| Depth | 3.34 in (84.84 mm) |
| Material | Copper: winding |
| Fingersafe Cover Compatibility | FSC1 |

Environment

| | |
|------------------------|--|
| Certifications | CSA file LR37055 guide 184-N-90 UL listed file E61239 |
| Enclosure Type | Not rated (open device) |
| Insulation Temperature | 221 °F (105 °C) |

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US10CP816206 |
| Discount Schedule | 0CP8 |
| GTIN | 785901039242 |
| Returnability | No |
| Country of origin | US |

Packing Units

| | |
|------------------------|-----|
| Unit Type of Package 1 | PCE |
|------------------------|-----|

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|------------------------------|-------------------------|
| Nbr. of units in pkg. | 1 |
| Package 1 Height | 3.70 in (9.398 cm) |
| Package 1 Width | 4.10 in (10.414 cm) |
| Package 1 Length | 4.10 in (10.414 cm) |
| Package weight(Lbs) | 5.501 lb(US) (2.495 kg) |

Contractual warranty

| | |
|-----------------|----------|
| Warranty | 10 Years |
|-----------------|----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration


Dimensions

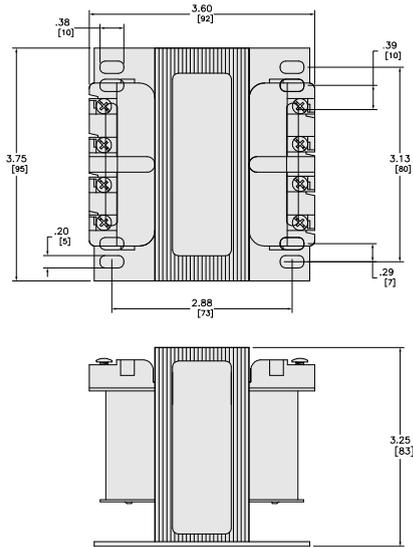

in
[mm]
Catalog Numbers
9070T75D18
9070T75D20
9070T75D95

Technical Illustration

Wiring diagram

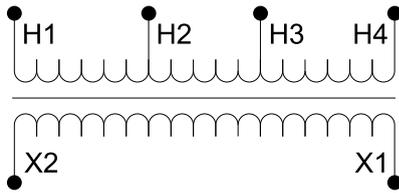

Options

| Voltage Code | Voltages | | Connections | |
|--------------|-------------|-----------|---|----------------------|
| | Primary | Secondary | Primary | Secondary |
| D20 | 208/230/460 | 115 | 208: Connect to H1 and H2 230: Connect to H1 and H3 460: Connect to H1 and H4 | Connect to X1 and X2 |

REFER TO TECHNICAL DOCUMENTATION FOR COMPLETE INFORMATION.