

Product data sheet

Specifications

SQUARE D



Industrial control transformer, Type TF, 1 phase, 250VA, 600V primary, 120V secondary, 50/60Hz

9070TF250D5

Product availability: Non-Stock - Not normally stocked in distribution facility

Complementary

Power Rating	250 VA UL 250 VA CSA 250 VA NOM 160 VA CE
Primary to Secondary Voltage	600 V 120 V 575 V 115 V 550 V 110 V
Fuse type	0.41 x 1.50 in CC top
Temperature rise	80 °C
Height	4.55 in (115.57 mm)
Width	3.75 in (95.25 mm)
Depth	5.25 in (133.35 mm)
Material	Copper: winding

Environment

Product Certifications	CE CSA file LR37055 guide 184-N-90 UL listed file E61239
Insulation temperature	266 °F (130 °C)

Ordering and shipping details

Category	US10CP816207
Discount Schedule	0CP8
GTIN	785901307068
Returnability	No
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	6.50 in (16.51 cm)
Package 1 Width	6.80 in (17.272 cm)
Package 1 Length	7.60 in (19.304 cm)
Package weight(Lbs)	7.701 lb(US) (3.493 kg)

Contractual warranty

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Warranty

18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration

Dimensions

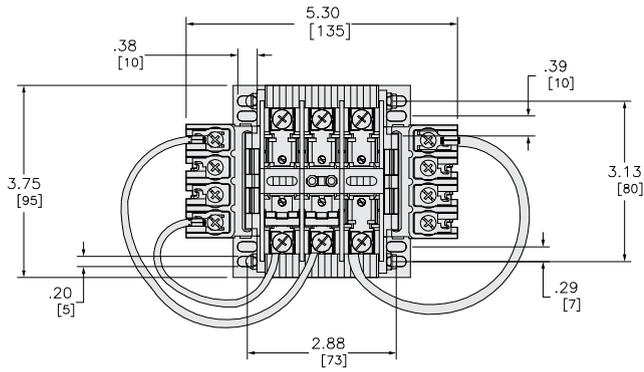

in.
[mm]
Catalog Numbers
9070TF250D3
9070TF250D5

