

Product data sheet

Specifications

SQUARE D



Circuit protector, Linergy, thermal magnetic overcurrent, track mount, 15.0A, 125VAC, 65VDC

9080GCB150

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	9080GCB
Product or Component Type	Circuit Protector
Trip Unit Type	Thermal-magnetic
Electrical Connection	Box lugs

Complementary

Protection Type	Overcurrent
Contact operation	Trip-free
Device Application	Industrial Application
Line Rated Current	15 A
Number of Poles	1P
Voltage Rating	65 V DC 125 V AC
Wire Size	AWG 16...AWG 10 copper
Wire stripping length	0.5 in (12.7 mm)
Terminal Tightening Torque	Control circuit 7 lbf.in (0.8 N.m) cage type connector
Terminal Rating	Factory wiring only
Operating Temperature	-30...60 °C (-22...140 °F)
Calibration Temperature	21 °C (70 °F)
Mounting Support	9080GH track 35 mm DIN rail
Height	3.45 in (87.63 mm)
Width	3.15 in (80.01 mm)
Depth	0.5 in (12.7 mm)

Environment

Product Certifications	CE CSA file 025490 class 3211 07 UL recognized E233026 CCN QVNU2
Standards	CSA C22.2 No 235 UL 1077 DIN 57470

Ordering and shipping details

Category	US10CP521703
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	0CP5
GTIN	785901481003
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.00 in (2.54 cm)
Package 1 Width	3.20 in (8.128 cm)
Package 1 Length	3.70 in (9.398 cm)
Package weight(Lbs)	2.560 oz (72.575 g)
Unit Type of Package 2	PAL
Number of Units in Package 2	2000
Package 2 Height	40.00 in (101.6 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	338.000 lb(US) (153.314 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

Repack and remanufacture

Take-back	No
-----------	----

Technical Illustration

Dimensions

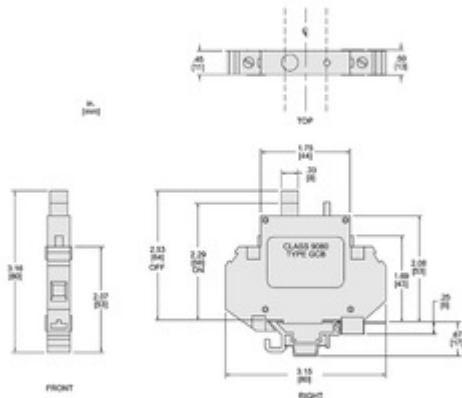

ALL DIMENSIONS ARE APPROXIMATE.
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.