

# Product data sheet

Specifications

SQUARE D



Power distribution block, Linergy, 3 pole, 1 line, 4 load, 175A Cu, 135A Al, 600V

9080LBA362104

Product availability: Stock - Normally stocked in distribution facility

## Main

Range	9080LB
Product	Power Distribution Block
Current Rating	175 A copper 135 A aluminium
Short Circuit Current Rating	65 kA

## Complementary

Voltage Rating	600 V AC/DC
Mounting Type	Surface mount
Number of poles	3
Terminals per Pole	1 line 4 load
Wire Size	Line 4, AWG 14...AWG 2/0, copper or aluminium Load 2, AWG 14...AWG 4, copper or aluminium
Electrical Connection	Tin plated aluminium lugs
SCCR	100 kA UL 508 A
Ambient Air Temperature for Operation	-40...150 °C (-40...302 °F)
Block Material	Phenolic: block
Terminal Tightening Torque	Line lug 40 lbf.in (4.5 N.m) AWG 8 copper or aluminium Line lug 35 lbf.in (4.0 N.m) AWG 12...AWG 10 copper or aluminium Line lug 35 lbf.in (4.0 N.m) AWG 14 copper Line lug 120 lbf.in (13.6 N.m) AWG 6...AWG 2/0 copper or aluminium Load lug 120 lbf.in (13.6 N.m) AWG 14...AWG 4 copper
Wire stripping length	Line: 0.5 in (12.7 mm) Load: 0.44 in (11.18 mm) for top connection Load: 0.75 in (19.05 mm) for bottom connection
Height	2.88 in (73.15 mm)
Width	1.94 in (49.28 mm)
Depth	1.78 in (45.21 mm)
End Barrier	9080LB23
Net Weight	0.49 lb(US) (0.22 kg)

## Environment

Certifications	CSA file 70361 class 6228 01 UL recognized E60616 CCN XCFR2 CE
----------------	--

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Ordering and shipping details

Category	US10CP121711
Discount Schedule	0CP1
GTIN	785901097457
Returnability	Yes
Country of origin	US

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.90 in (4.826 cm)
Package 1 Width	2.80 in (7.112 cm)
Package 1 Length	2.80 in (7.112 cm)
Package weight(Lbs)	8.000 oz (226.796 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	4
Package 2 Height	2.20 in (5.588 cm)
Package 2 Width	5.90 in (14.986 cm)
Package 2 Length	6.00 in (15.240 cm)
Package 2 Weight	33.599 oz (952.543 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	24
Package 3 Height	7.60 in (19.304 cm)
Package 3 Width	6.45 in (16.383 cm)
Package 3 Length	12.00 in (30.480 cm)
Package 3 Weight	13.0007 lb(US) (5.897 kg)

## Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>

## Use Again

### Repack and remanufacture


Circularity Profile	No need of specific recycling operations
Take-back	No

## Dimensions Drawings

## Approximate Dimensions

## ELECTRICAL CLEARANCE / WIRE BENDING SPACE

Wire bending space is based on the maximum wire size of the terminal and NEC Article 430-10. Wire bending space for the bottom is the same as the top wire bending space.

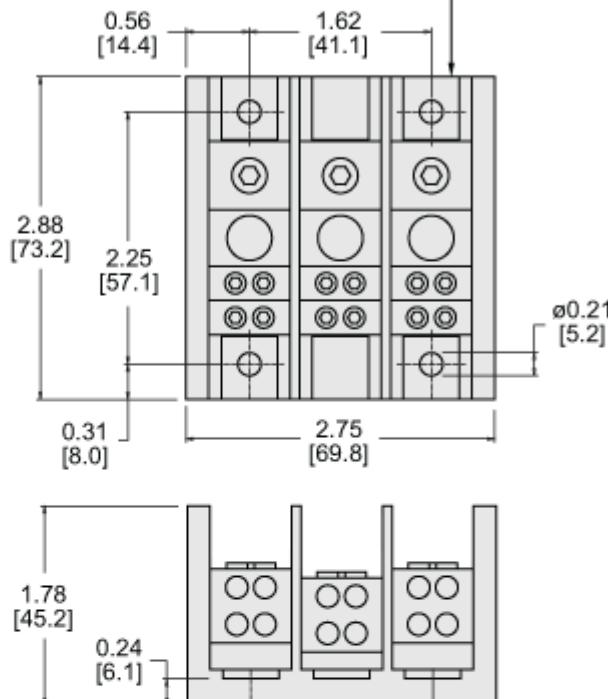

Power Distribution Block	Recommended Tightening Torque					
	Main		Branch		Wire Size	Torque
	Wire Size	Torque	Wire Size	Torque		
9080LBA362101	#6-2/0	120	13.5	#6-2/0	120	13.5
	#8	40	4.5	#8	40	4.5
	#14-#10	35	4.0	#14-#10	35	4.0
9080LBA362104	#6-2/0	120	13.5	#14-#4	35	4.0
	#8	40	4.5			
	#14-#10	35	4.0			

Power Distribution Block	Lug Wire Range **			Weight lbs. (kg)
	Main		Branch	
9080LBA362101	(1) #14-2/0		(1) #14-2/0	.31 (.20)
9080LBA362104	(1) #14-2/0		(4) #14-4	.47 (.24)

\*\* Lugs suitable for use with 75°C conductors based on NEC Table 310-16.

## Technical Illustration

## Dimensions

