

# Product data sheet

Specifications

SQUARE D



Power distribution block, Linergy, 3 pole, 1 line, 4 load, 335A Cu, 270A Al, 600V

9080LBA363104

Product availability: Stock - Normally stocked in distribution facility

## Main

Range	9080LB
Product	Power Distribution Block
Current Rating	335 A copper 270 A aluminium
Short Circuit Current Rating	65 kA

## Complementary

Voltage Rating	600 V AC/DC
Mounting Type	Surface mount
Number of poles	3
Terminals per Pole	1 line 4 load
Wire Size	Load 1, AWG 14...AWG 2, copper or aluminium Line 4, AWG 6...400 kcmil, copper or aluminium
Electrical Connection	Tin plated aluminium lugs
SCCR	100 kA UL 508 A
Ambient Air Temperature for Operation	-40...150 °C (-40...302 °F)
Block Material	Phenolic: block
Terminal Tightening Torque	Load lug 45 lbf.in (5.08 N.m) AWG 6...AWG 4 copper or aluminium Load lug 40 lbf.in (4.5 N.m) AWG 8 copper or aluminium Load lug 35 lbf.in (4.0 N.m) AWG 14 copper Line lug 275 lbf.in (31.07 N.m) AWG 6...350 kcmil copper or aluminium Load lug 50 lbf.in (5.6 N.m) AWG 2 copper or aluminium Load lug 35 lbf.in (4.0 N.m) AWG 12...AWG10 copper or aluminium
Wire stripping length	Line: 1.06 in (26.92 mm) Load: 0.56 in (14.22 mm) for top connection Load: 1 in (25.4 mm) for bottom connection
Height	3.38 in (85.85 mm)
Width	1.94 in (49.28 mm)
Depth	2.61 in (66.29 mm)
End Barrier	9080LB33
Net Weight	1.57 lb(US) (0.71 kg)

## Environment

Certifications	CSA file 70361 class 6228 01 UL recognized E60616 CCN XCFR2 CE
----------------	--

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Ordering and shipping details

---

Category	US10CP121711
Discount Schedule	0CP1
GTIN	785901157090
Returnability	Yes
Country of origin	US

## Packing Units

---

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.00 in (7.620 cm)
Package 1 Width	4.30 in (10.922 cm)
Package 1 Length	5.30 in (13.462 cm)
Package weight(Lbs)	24.800 oz (703.068 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	16
Package 2 Height	11.30 in (28.702 cm)
Package 2 Width	9.50 in (24.130 cm)
Package 2 Length	13.40 in (34.036 cm)
Package 2 Weight	26.341 lb(US) (11.948 kg)

## Contractual warranty

---

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant
REACH Regulation	<a href="#">REACH Declaration</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a>


## Use Again

### Repack and remanufacture

Circularity Profile	No need of specific recycling operations
Take-back	No

## Technical Illustration

## Dimensions

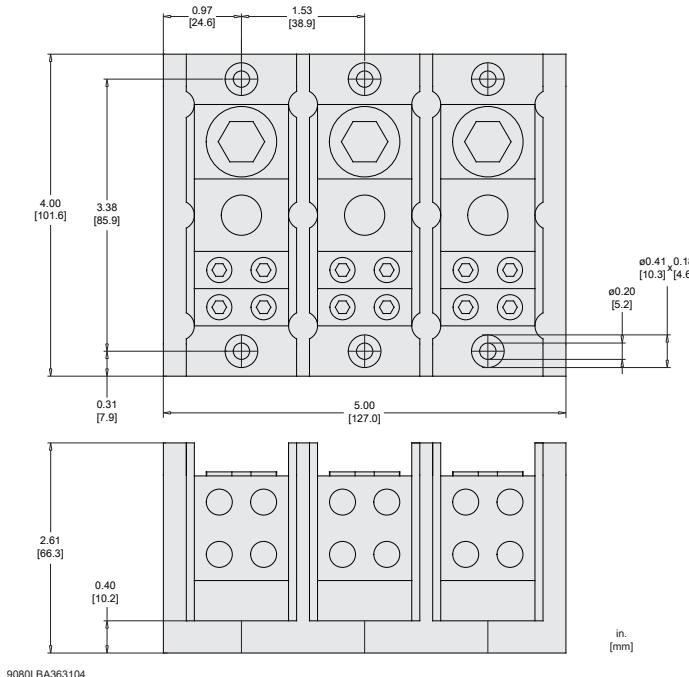

9080LBA363104