

Product data sheet

Specifications

SQUARE D



Operating mechanism, flange mounted, variable depth, handle mechanism, 12in handle, NEMA 4X enclosure

9422A8

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Handle Mechanism
For Use With	9422TG2 disconnect switch 9422TG1 disconnect switch

Complementary

Product Type	Variable depth
Product destination	9422TG1 disconnect switch 9422TG2 disconnect switch
Enclosure Types	NEMA 4/4X enclosures
Handle Length	12 in (304.8 mm)

Ordering and shipping details

Category	US10CP121732
Discount Schedule	0CP1
GTIN	785901624905
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.00 in (12.7 cm)
Package 1 Width	12.30 in (31.242 cm)
Package 1 Length	23.30 in (59.182 cm)
Package weight(Lbs)	10.0002 lb(US) (4.536 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

 Repack and remanufacture	
Take-back	No

Technical Illustration

Dimensions

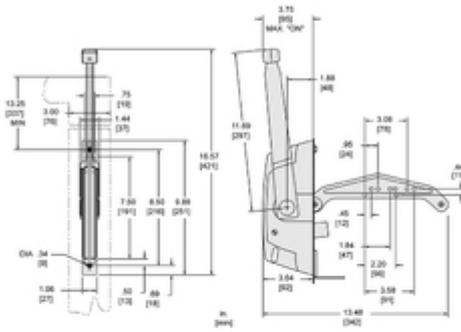

TYPE	USAGE
A5	HANDLE MECHANISM COMPLETE FOR FIXED DEPTH INSTALLATION IN SERIES 1, 2, 3, 3R, AND 4 (DIRECT METAL ENCLOSURE)
A6	HANDLE MECHANISM COMPLETE FOR FIXED DEPTH INSTALLATION IN SERIES 6 (STAINLESS STEEL ENCLOSURE)
A7	HANDLE MECHANISM COMPLETE FOR ADJUSTABLE DEPTH INSTALLATION IN SERIES 1, 2, 3, 3R, AND 4 (DIRECT METAL ENCLOSURE)
A8	HANDLE MECHANISM COMPLETE FOR ADJUSTABLE DEPTH INSTALLATION IN SERIES 4 (STAINLESS STEEL ENCLOSURE)

ALL DIMENSIONS ARE APPROXIMATE.
 REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.
 12 INCH HANDLES ARE FOR USE WITH 655A TYPE T01 AND T02 DISCONNECT SWITCHES ONLY.