


# Product data sheet

Specifications

SQUARE D



Disconnect mechanism, circuit breaker, cable operated, 400A, 2/3 pole, LAL/LHL, 60in cable

9422CLA50

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Range	9422C
Product	Single Cable Operating Mechanism

## Complementary

Circuit Breaker Type	LAL/LHL 2 LAL/LHL 3 Q4L 2 Q4L 3
Included	Ordered separately
Number of Cables	1
Cable Length	60 in

## Ordering and shipping details

Category	US10CP121732
Discount Schedule	0CP1
GTIN	785901353256
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.00 in (22.86 cm)
Package 1 Width	11.50 in (29.21 cm)
Package 1 Length	20.00 in (50.8 cm)
Package weight(Lbs)	14.048 lb(US) (6.372 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>

### Use Again

 <b>Repack and remanufacture</b>	
Take-back	No


Technical Illustration

Dimensions

CABLE LENGTH	BOX DEPTH MAX.	MAX. DISTANCE FROM TOR RIGHT MTG. HOLE TO UPPER MTG. HOLE FOR HANDLE OPERATOR
36.00 [914]	24.00 [610]	7.00 [178]
60.00 [1524]	36.00 [914]	24.00 [610]
120.00 [3048]	36.00 [914]	60.00 [1524]

in. [mm]

Minimum to wall or barrier to insure adequate wire bending space to lug surface when the maximum wire size is used with standard lugs. REF NEC 430-10

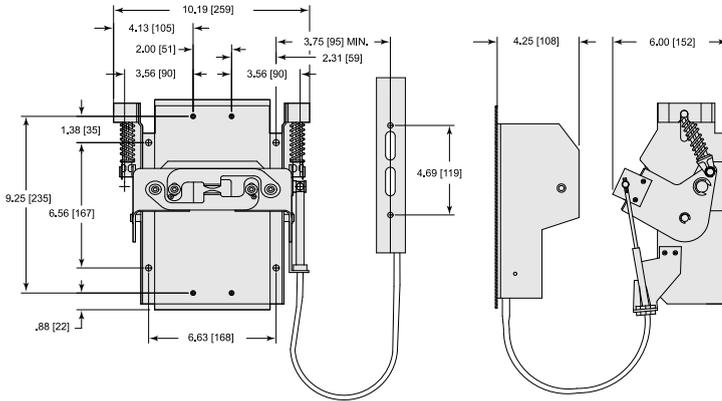

ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO CAD AND TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.