


# Product data sheet

Specifications

SQUARE D



Disconnect mechanism, circuit breaker, cable operated, 250A, 4 poles, MG-NSF circuit breaker, 60 inch cable

9422CSF504

Product availability: Stock - Normally stocked in distribution facility

## Main

Range	9422C
Product	Single Cable Operating Mechanism

## Complementary

Circuit Breaker Type	MG-NSF 4
Included	Ordered separately
Number of Cables	1
Cable Length	60 in

## Ordering and shipping details

Category	US10CP121732
Discount Schedule	0CP1
GTIN	785901928294
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	7.20 in (18.3 cm)
Package 1 Width	12.80 in (32.5 cm)
Package 1 Length	13.39 in (34.0 cm)
Package weight(Lbs)	6.2 lb(US) (2.8 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.


## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.


[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better


 <b>Materials and Substances</b>	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
<a href="#">EU RoHS Directive</a>	Compliant
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
PVC free	Yes

### Use Again

 <b>Repack and remanufacture</b>	
Take-back	No

Technical Illustration

Dimensions

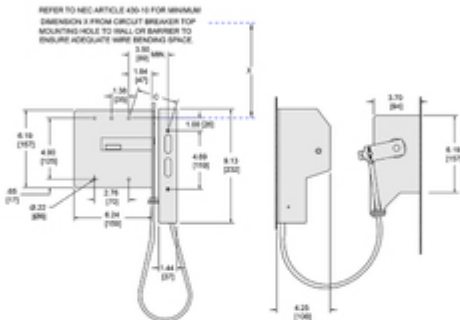

TYPE	CABLE LENGTH	MINIMUM WIRE DEPTH	MAXIMUM DISTANCE FROM TOP MOUNTING HOLE TO HANDLE OPERATOR (SEE IEC 400-13)	MINIMUM
S422CSF504	36"	3 1/2"	3 1/2"	300MM
S422CSF504	60"	3 1/2"	3 1/2"	300MM
S422CSF504	120"	3 1/2"	3 1/2"	300MM

NOTE: BENDING RADIUS IN CABLE MUST NEVER BE LESS THAN 6 INCHES. ELECTRICAL CLEARANCES MUST BE MAINTAINED BETWEEN CABLE AND LIVE ELECTRICAL PARTS. ALL DIMENSIONS ARE APPROXIMATE. REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.