

Product data sheet

Specifications

SQUARE D



Transformer, dry type,
encapsulated, 9kVA, 3 phase,
480V primary, 208Y/120V
secondary, 14C, 115C rise [TAA]

9T2F

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Dry Sealed Transformer
Primary to Secondary Voltage	480 V delta 208Y/120 V
Full Capacity Taps	2 5 % FCBN

Complementary

Enclosure Code	14C
Phase	3 phase
Power Rating	9 kVA
Temperature rise	115 °C
Height	14.75 in (374.65 mm)
Width	19.1 in (485.1 mm)
Depth	12.25 in (311.15 mm)
Enclosure mounting	Wall mounted
Net Weight	280.009 lb(US) (127.01 kg)
Enclosure Material	Painted sheet steel

Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product Certifications	UL Listed CSA cULus

Ordering and shipping details

Category	US10PE216277
Discount Schedule	0PE2
GTIN	785901359494
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Nbr. of units in pkg.	1
Package 1 Height	14.80 in (37.592 cm)
Package 1 Width	19.30 in (49.022 cm)
Package 1 Length	13.90 in (35.306 cm)
Package weight(Lbs)	280.0005 lb(US) (127.006 kg)

Compliance

Compliance	TAA
-------------------	-----

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration


Dimensions

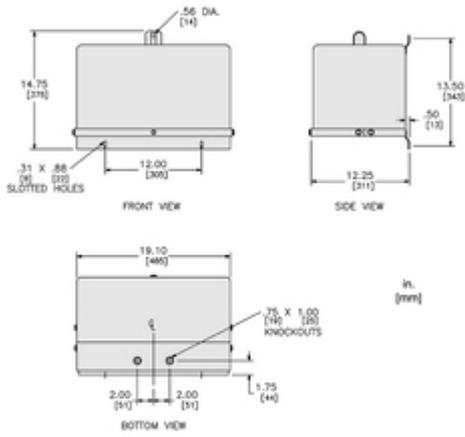

ALL DIMENSIONS ARE APPROXIMATE.
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

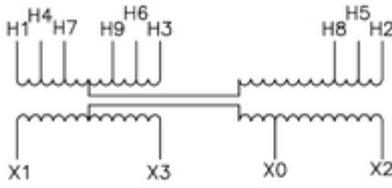

9T2F
 15T2F
 2 - 5% FCBN

480 DELTA - 208Y/120 CONNECT TO TAPS		
PRIMARY VOLTS	2-5% FCBN	2-2.5% FCAN 2-2.5% FCBN
504	-	H1, H2, H3
492	-	H4, H5, H6
480	H1, H2, H3	H7, H8, H9
468	-	H10, H11, H12
456	H4, H5, H6	H13, H14, H15
432	H7, H8, H9	-