

Product data sheet

Specifications

SQUARE D



Transformer, dry type, encapsulated, 9kVA, 3 phase, 480V primary, 240V secondary, 14C, 115C rise [TAA]

9T75F

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Dry Sealed Transformer
Primary to Secondary Voltage	480 V delta 240 V delta
Full Capacity Taps	4 2.5 % FCBN

Complementary

Enclosure Code	14C
Phase	3 phase
Power Rating	9 kVA
Temperature rise	115 °C
Height	14.75 in (374.65 mm)
Width	19.1 in (485.1 mm)
Depth	12.25 in (311.15 mm)
Enclosure mounting	Wall mounted
Enclosure Material	Painted sheet steel

Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product Certifications	cULus CSA UL Listed

Ordering and shipping details

Category	US10PE216277
Discount Schedule	0PE2
GTIN	785901358046
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Height	14.700 in (37.338 cm)
Package 1 Width	19.300 in (49.022 cm)
Package 1 Length	13.900 in (35.306 cm)
Package weight(Lbs)	280.0005 lb(US) (127.006 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	6
Package 2 Height	40.000 in (101.600 cm)
Package 2 Width	40.000 in (101.600 cm)
Package 2 Length	48.000 in (121.920 cm)
Package 2 Weight	1680.0010 lb(US) (762.035 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Compliant

California proposition 65

WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile


No need of specific recycling operations

Take-back

No

Technical Illustration


Dimensions

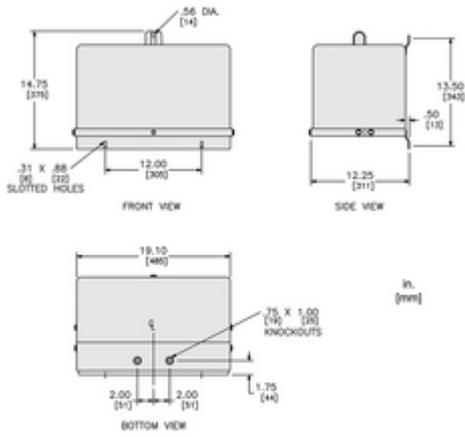

ALL DIMENSIONS ARE APPROXIMATE.
ALSO REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

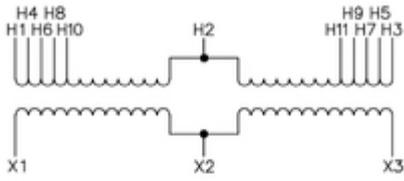

9T75F
 15T75F
 4 - 2.5% FCBN

480 DELTA - 240 DELTA CONNECT TO TAPS	
PRIMARY VOLTS	4-2.5% FCBN
480	H1, H2, H3
468	H4, H2, H5
456	H6, H2, H7
444	H8, H2, H9
432	H10, H2, H11