

Product data sheet

Specifications

SQUARE D



Safety switch, general duty,
fusible, 2 pole, 3 wire,
120/240VAC, 30A, Type 1, with
neutral

D211N

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	General duty
Device Application	Residential
Disconnect Type	Fusible disconnect switch
Factory Installed Neutral	Neutral/earth strip 2 x 16 mm ² 5 x 6 mm ²
Number of Poles	2
Current Rating	30 A
Voltage Rating	120 V AC
Enclosure Rating NEMA	NEMA 1
Motor power hp	0.5 hp at 120 V AC 60 Hz for 1 phase motors 2 hp at 120 V AC 60 Hz for 1 phase motors 1.5 hp at 240 V AC 60 Hz for 1 phase motors 3 hp at 240 V AC 60 Hz for 1 phase motors

Complementary

Short Circuit Current Rating	10 kA plug
Fuse type	Plug
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	3-wire
Wire Size	AWG 14...AWG 6 copper AWG 12...AWG 6 aluminium
Tightening torque	30 lbf.in (3.4 N.m) 0.003...0.02 in ² (2.08...13.3 mm ²) (AWG 14...AWG 6)
Depth	3.63 in (92.20 mm)
Width	7.25 in (184.15 mm)
Height	9.25 in (234.95 mm)
Net Weight	16.006 lb(US) (7.26 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	US1DE1A00006
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	DE1A
GTIN	785901460329
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	5.50 in (13.97 cm)
Package 1 Width	7.00 in (17.78 cm)
Package 1 Length	9.50 in (24.13 cm)
Package weight(Lbs)	4.171 lb(US) (1.892 kg)
Unit Type of Package 2	CAR
Number of Units in Package 2	5
Package 2 Height	9.800 in (24.892 cm)
Package 2 Width	8.400 in (21.336 cm)
Package 2 Length	19.00 in (48.26 cm)
Package 2 Weight	22.249 lb(US) (10.092 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	150
Package 3 Height	40.0 in (101.6 cm)
Package 3 Width	40.0 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	667.999 lb(US) (302.999 kg)

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Compliant with Exemptions

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

PVC free

Yes

Use Again

Repack and remanufacture

Circularity Profile

No need of specific recycling operations

Take-back

No


WEEE Label

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Wiring diagram

FUSIBLE

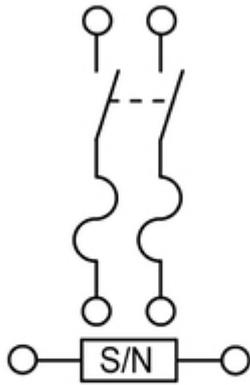

D211N

D221N