

Product data sheet

Specifications

SQUARE D



Safety switch, general duty, fusible, 3 pole, 4 wire, 240VAC, 600A, Type 1, with neutral

D326N

Product availability: Stock - Normally stocked in distribution facility

Main

Product	Single Throw Safety Switch
Duty Rating	General duty
Device Application	Residential
Disconnect Type	Fusible disconnect switch
Factory Installed Neutral	Neutral (factory installed)
Number of Poles	3
Current Rating	600 A
Voltage Rating	240 V AC
Enclosure Rating NEMA	NEMA 1
Motor power hp	75 hp at 240 V AC 60 Hz for 3 phase motors 150 hp at 240 V AC 60 Hz for 3 phase motors

Complementary

Short Circuit Current Rating	100 kA maximum depending on fuse H, K, J or R
Fuse type	H, K, J or R
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire (3PH + G)
Wire Size	AWG 4...500 kcmil aluminium/copper
Tightening torque	450 lbf.in (50.8 N.m) (AWG 4...500 kcmil)
Depth	8.88 in (225.55 mm)
Width	24.88 in (631.95 mm)
Height	45.12 in (1146.05 mm)
Net Weight	116.8 lb(US) (53 kg)

Environment

Certifications	UL listed file E2875
----------------	----------------------

Ordering and shipping details

Category	US1DE1A00007
Discount Schedule	DE1A
GTIN	785901461623

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Returnability	Yes
---------------	-----

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	11.5 in (29.2 cm)
------------------	-------------------

Package 1 Width	26.0 in (66.0 cm)
-----------------	-------------------

Package 1 Length	51.5 in (130.8 cm)
------------------	--------------------

Package weight(Lbs)	127.000 lb(US) (57.606 kg)
---------------------	----------------------------

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1811
Environmental Disclosure	Product Environmental Profile

Use Better


 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant with Exemptions
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Halogen content performance	Halogen free plastic parts product
PVC free	Yes

Use Again

 Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

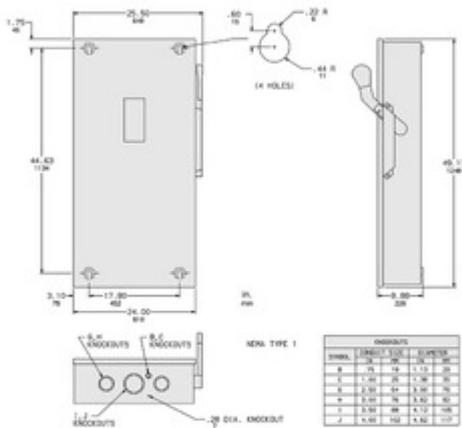


ALL DIMENSIONS ARE APPROXIMATE.
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.

Technical Illustration

Wiring diagram

FUSIBLE



D326N
D326NT