

# Product data sheet

Specifications

SQUARE D



Safety switch, general duty, fusible, 3 pole, 4 wire, 240VAC, 600A, Type 3R, with neutral

D326NTR

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

Product	Single Throw Safety Switch
Duty Rating	General duty
Device Application	Residential
Disconnect Type	Fusible disconnect switch
Factory Installed Neutral	Neutral (factory installed)
Number of Poles	3
Current Rating	600 A
Voltage Rating	240 V AC
Enclosure Rating NEMA	NEMA 3R
Motor power hp	75 hp at 240 V AC 60 Hz for 3 phase motors

## Complementary

Short Circuit Current Rating	100 kA T
Fuse type	T
Mounting Type	Surface
Electrical Connection	Lugs
Wiring configuration	4-wire (3PH + G)
Wire Size	AWG 4...500 kcmil aluminium/copper
Tightening torque	450 lbf.in (50.8 N.m) (AWG 4...500 kcmil)
Depth	8.88 in (225.55 mm)
Width	25.13 in (638.30 mm)
Height	49.13 in (1247.90 mm)
Net Weight	110.2 lb(US) (50 kg)

## Environment

Certifications	UL listed file E2875
----------------	----------------------

## Ordering and shipping details

Category	US1DE1A00059
Discount Schedule	DE1A
GTIN	785901003717
Returnability	No

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

Country of origin	MX
-------------------	----

## Packing Units

---

Unit Type of Package 1	PCE
------------------------	-----

---

Nbr. of units in pkg.	1
-----------------------	---

---

Package 1 Height	12.008 in (30.5 cm)
------------------	---------------------

---

Package 1 Width	26.0 in (66.0 cm)
-----------------	-------------------

---

Package 1 Length	52.008 in (132.1 cm)
------------------	----------------------

---

Package weight(Lbs)	133.0006 lb(US) (60.328 kg)
---------------------	-----------------------------

## Contractual warranty

---

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle) **1838**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant with Exemptions**

REACH Regulation [REACH Declaration](#)

California proposition 65 **WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

Halogen content performance **Halogen free plastic parts product**

PVC free **Yes**

## Use Again

### Repack and remanufacture


Circularity Profile **No need of specific recycling operations**

Take-back **No**

Technical Illustration

Dimensions

---

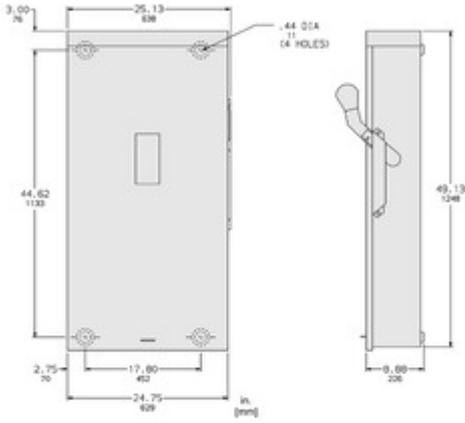

NEW TYPE 30  
NO KNOCKOUTS


ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.

Technical Illustration

Wiring diagram

---

FUSIBLE



D326NR  
D326NTR