

Product data sheet

Specifications



LED bulb, Harmony XVB, BA 15d, blue, steady light, 120V AC

DL1BDG6

⚠ Discontinued on: Jun 30, 2025

⚠ Discontinued

Product availability: Stock - Normally stocked in distribution facility

Main

Range Compatibility	Harmony XVD Harmony XVB Harmony XVP
Accessory / separate part designation	Protected LED bulb
Accessory / Separate Part Type	LED bulb
Accessory / separate part category	Lighting accessories
Accessory / separate part destination	Beacon and indicator bank
[Us] rated supply voltage	120 V AC
Signalling type	Steady
Signalling colour	Blue
Sale per indivisible quantity	1

Complementary

Current Consumption	17 mA
Bulb base	BA 15d
Net Weight	0.033 lb(US) (0.015 kg)

Ordering and shipping details

Category	US100XV22611
Discount Schedule	00XV
GTIN	3389110118155
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.38 in (3.5 cm)
Package 1 Width	1.77 in (4.5 cm)
Package 1 Length	2.36 in (6.0 cm)
Package weight(Lbs)	0.4 oz (12.0 g)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Unit Type of Package 2	S01
Number of Units in Package 2	60
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	33.3 oz (945.0 g)

Contractual warranty

Warranty	18 months
-----------------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	13
--	----

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

REACH Regulation	REACH Declaration
------------------	-----------------------------------

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	--

Use Again

Repack and remanufacture

Circularity Profile	No need of specific recycling operations
---------------------	--

Take-back	No
-----------	----

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB

Robust product performance with high IP protection and IK05 shock resistance



Conformity with International standards



Greater loudness up to 90dB with continuous and intermittent tones




Beacon lens on top with high intensity 5J, 10J Xenon flash, increase visibility from top and surrounding



Offer Marketing Illustration

Product benefits / Features

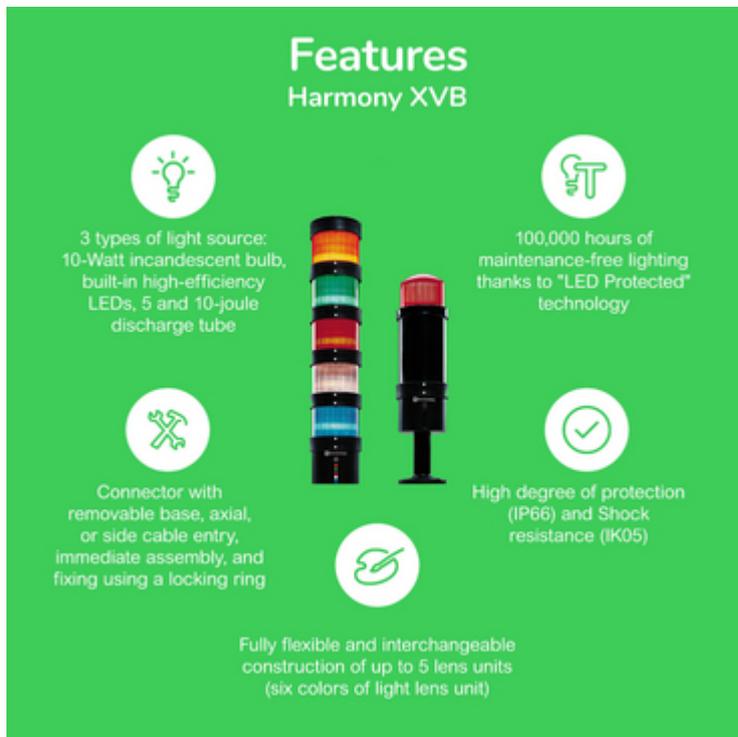

The infographic features a central image of two Harmony XVB light fixtures: one tall with five stacked lens units in red, yellow, green, blue, and red, and one shorter with a single red lens unit. The background is a vibrant green. The title 'Features Harmony XVB' is at the top center. Five circular icons with white backgrounds and green symbols are arranged around the central image. Each icon is accompanied by a text block describing a specific feature. The features include: 1. Three types of light sources (incandescent, LED, and discharge tube). 2. 100,000 hours of maintenance-free lighting. 3. High protection (IP66) and shock resistance (IK05). 4. Fully flexible and interchangeable construction of up to 5 lens units. 5. A connector with a removable base, axial, or side cable entry.

Features Harmony XVB

-  3 types of light source: 10-Watt incandescent bulb, built-in high-efficiency LEDs, 5 and 10-joule discharge tube
-  100,000 hours of maintenance-free lighting thanks to "LED Protected" technology
-  Connector with removable base, axial, or side cable entry, immediate assembly, and fixing using a locking ring
-  High degree of protection (IP66) and Shock resistance (IK05)
-  Fully flexible and interchangeable construction of up to 5 lens units (six colors of light lens unit)

Image of product / Alternate images

Alternative

